


RECEIVED
STATE CORPORATION COMMISSION
1-3-75
JAN 3 1975

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

CONSERVATION DIVISION
Wichita, Kansas

FORM CP-4

WELL PLUGGING RECORD

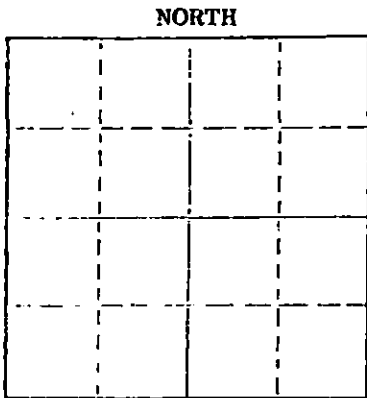

Locate well correctly on above Section Plat

Ford County, Sec. 27 Twp. 27 Rge. 21 (E) (W)
Location as "NE/CNW&SW&E" or footage from lines SE SE
Lease Owner Halliburton Oil Producing Co.
Lease Name Young B#1 Well No.
Office Address Oklahoma City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 11/16/74 19
Plugging completed 11/23/74 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Thomas
Producing formation Depth to top Bottom Total Depth of Well 5059'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	570	none
				5 1/2"	5055	2229'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 5059', sanded to 4930' and ran 5 sacks cement.
Loaded hole with water, shot pipe at 4206', parted pipe. Pulled 23 joints of 5 1/2" casing, ran 23 joints, hdd to pump 5 joints down.
Pumped mud, bridge to 4000', shot pipe at 3600', 3403', 3196', 3100', 3007', 2910', 2808', 2710', 2607', 2506', 2405', 2310', 2215', pulled 67 joints. Pumped 3 sacks gel, 5 sacks hulls and 50 sacks cement to 570', mixed 10 gel, 3 hulls, hole in surface pipe. Mud circulated around outside of pipe. PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 31st day of Dec. 19 74

Margaret Melcher
Notary Public.

My commission expires
MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

RECEIVED
JAN 01 1975
HALLIBURTON OIL PRODUCING CO
COMP. CHECKED