


15-155-00260-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

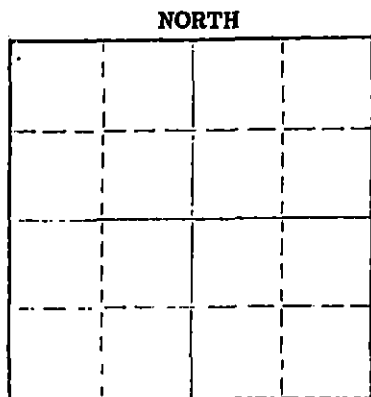

Locate well correctly on above Section Plat

Reno County, Sec. 29 Twp. 26 Rge. 4 (E) (W)X
Location as "NE/CNW/SW" or footage from lines NW/NW/NW
Lease Owner Woodman-Iannitti Drilling Co.
Lessee Name A. J. GEUBELLE Well No. 1
Office Address Box 308, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Gas Well
Date well completed 19
Application for plugging filed October 6 1976
Application for plugging approved 19
Plugging commenced October 21 1976
Plugging completed November 3 1976
Reason for abandonment of well or producing formation depleted
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 4033 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	251'	none
				5 1/2"	4028'	3,356.31'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Measured total depth at 3610'.
Pushed plug to 3525'. Dumped 25 ft. sand and 5 sacks cement.
Shot pipe @ 3490' and 3400'.
Pulled a total of 100 joints of 5 1/2" casing.
Built a rock bridge from 380' to 350' and plugged well with 8 yards ready-mix concrete.
11-5-76

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.
Address Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
Box 698, Great Bend, Kansas 67530 (Address)

SUBSCRIBED AND SWORN TO before me this 4th day of November, 1976.

My commission expires May 21, 1980
Marla K. Haslam Notary Public.

WOODMAN & IANNITTI DRILLING COMPANY
Rotary Drilling Contractors

1008 UNION NATIONAL BUILDING
WICHITA, KANSAS 67202

15-155-00260-0000

Company; Fleming & Woodman &
Frank Oyster
Farm; A. J. Geubelle #1
Location; NW NW NW
Section; 29-26-4W
Reno; Reno
Contractor; Fleming & Woodman
Comm; Jan. 17, 1955
Compl; Feb. 8, 1955
Casing; 8 5/8 @ 251
5 1/2 @ 4028 Total Depth 4033

Figures Indicate Bottom Of Formations:

35	Surface Soil & Rock
50	Sand
90	Sand
251	Shale & Shells
620	Shale & Shells
635	Shale & Shells
648	Anhy & Salt
820	Shale & Lime
975	Lime & Shale
1050	Shale & Lime
1145	Lime
1184	Shale & Flint
1260	Shale & Lime
1745	Lime & Shale
2145	Lime & Shale
2720	Lime & Shale
2735	Lime & Shale
2830	Shale & Lime
2930	Lime
3044	Lime
3130	Lime
3230	Lime
3335	Lime & Shale
3470	Lime & Shale
3605	Lime & Shale
3625	Miss. & Chert
3657	Miss
3690	Miss. & Chert
3725	Chert
3778	Chat
3855	Miss.
3872	Miss.
3925	Shale & Chert
3965	Shale
4021	Shale & Sand
4031	Viola & Sand
4033	Simpson Sand

RECEIVED
STATE CORPORATION COMMISSION

OCT 06 1976

CONSERVATION DIVISION
Wichita, Kansas

I certify the above to be a true & correct copy of the driller's log to the best of my knowledge

K. T. Woodman
K. T. Woodman