


15-155-62377-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Reno County, Sec 29 Twp. 26 Rge. 4 (E) (W) X

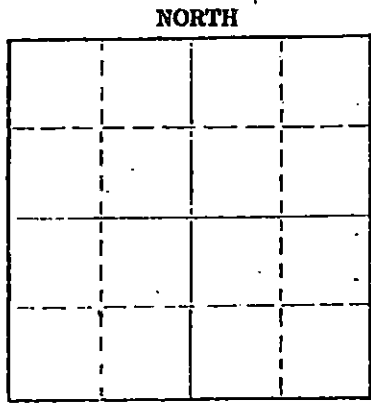

Locate well correctly on above Section Flat

Location as "NE/CNW/SW" or footage from lines SE/NW/NW
Lease Owner Woodman-Iannitti Drilling Co.
Lease Name A. J. GEUBELLE Well No. 2
Office Address Box 308, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Input well
Date well completed 19
Application for plugging filed October 6 1976
Application for plugging approved 19
Plugging commenced October 15 1976
Plugging completed October 20 1976
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 4045 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	245'	none
				5 1/2"	4044'	2,865.49'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Spudded out bridge @ 2200' and pushed plug to 3930'.
Dumped 25' sand and 5 sacks cement. Shot pipe at 3420'.
Pulled a total of 91 joints of 5 1/2" casing to parted joint.
Pushed plug to 350' and built a rock bridge to 335'.
Plugged well with 5 yards ready-mix concrete.

11-5-70

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.
Address P.O. Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained, and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
Box 698, Great Bend, Kansas 67530
(Address)

Subscribed and sworn to before me this 4th day of November 1976

My commission expires May 21, 1980
Marla K. Haslam Notary Public

K. T. WOODMAN
REB. PHONE 733-D418
OFF. PHONE 265-7650
WICHITA, KANSAS

D. J. IANNITTI
PHONE 792-2921
GREAT BEND, KANSAS

WOODMAN & IANNITTI DRILLING COMPANY
Rotary Drilling Contractors

1008 UNION NATIONAL BUILDING
WICHITA, KANSAS 67202

15-155-02377-0000

RECEIVED
STATE CORPORATION COMMISSION

OCT 06 1976

CONSERVATION DIVISION
Wichita, Kansas

Company: Fleming & Woodman
Farm; A. J. Geubelle #2
Location; SE NW NW
Section; 29-26-4W
County; Reno
Contractor; Fleming & Woodman
Comm; Oct. 5, 1955
Compl; Oct. 24, 1955
Total Depth; 4045'
Casing; 8 5/8 245 w/125 sx.
5 1/2 4044 w/100 sx.

Total Depth 4045

Figures Indicate Bottom Of Formations:

70	Sand & Soil
630	Shale & Shells
670	Shale & Shells
730	Anhy & Shale
885	Shale & Shells
1290	Lime & Shale
2290	Shale & Shells
2827	Lime & Shale
3018	Lime
3240	Lime
3288	Lime
3373	Lime & Shale
3403	Lime
3525	Lime & Shale
3588	Lime
3589	Lime & Shale
3702	Miss
3852	Miss
3878	Chert
3920	Chert & Miss
3965	Shale & Lime
4045	Lime & Shale

I certify the above to be a true and correct copy of the driller's log to the best of my knowledge and belief.

K. T. Woodman
K. T. Woodman