

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kiowa County. Sec. 10 Twp. 27S Rge. (E)20 (W)
Location as "NE/CNWSW4" or footage from lines C NW NE

Lease Owner Gabbert-Jones, Inc.
Lease Name Einsel "A" Well No. 1
Office Address 830 Sutton Place, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed Dec. 15, 19 69
Application for plugging filed (letter 12/17/69) Dec. 15, 19 69
Application for plugging approved Dec. 15, 19 69
Plugging commenced Dec. 16, 19 69
Plugging completed Dec. 16, 19 69
Reason for abandonment of well or producing formation _____

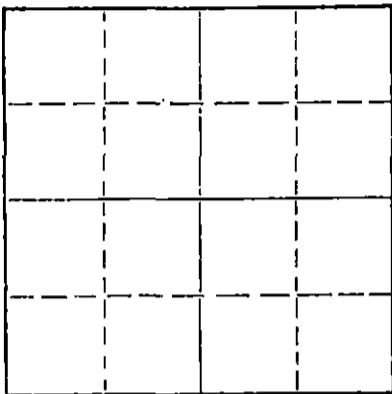

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Herman Justus
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4955 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	532	8-5/8"	532	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 525 feet. Set first plug @ 525' w/25 sacks cement.
Filled hole with heavy mud to 40 feet. Set second plug @ 40' w/1/2 sack hulls and 10 sacks cement. Plugged rat hole w/3 sacks cement. Job complete @ 2:15 AM, Dec. 16, 1969.


RECEIVED
STATE CORPORATION COMMISSION
DEC 18 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place - Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
E. E. Hall (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. E. Hall
830 Sutton Place - Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 17 day of December, 19 69
Barbara J. Layton
Barbara J. Layton Notary Public.



GABBERT-JONES, INC.
WICHITA, KANSAS,
DRILLERS' WELL LOG

EINSEL "A" #1
 C NW NE Section 10-27S-20W
 Kiowa County, Kansas

Commenced: December 1, 1969
 Completed: December 16, 1969

OPERATOR - Gabbert-Jones, Inc.

DEPTH		FORMATION	REMARKS
From	To		
0	160	Sand	
160	190	Shale and sand	
190	532	Shale and red bed	Ran 16' joints 8-5/8" casing, set @ 532' w/325 sacks cement.
532	1294	Shale and red bed	
1294	1375	Anhydrite	
1375	1725	Shale and shells	
1725	2015	Shale and lime	
2015	2260	Shale	
2260	2545	Lime and shale	
2545	2775	Lime	
2775	4250	Shale and lime	
4250	4483	Lime	
4483	4525	Lime and chert	
4525	4852	Lime	
4852	4930	Lime and shale	
4930	4955	Lime	
4955	TD		Dry and abandoned.

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled in the C NW NE Section 10-27S-20W, Kiowa County, Kansas, to the best of my knowledge and belief.

E. E. Hall

E. E. HALL


STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 17 day of December, 1969, personally appeared E. E. Hall to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires Feb. 1, 1972.

Barbara J. Layton
 Barbara J. Layton, Notary Public



RECEIVED
 STATE CORPORATION COMMISSION
 DEC 18 1969
 CONSERVATION DIVISION
 Wichita, Kansas