

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kiowa County, Sec. 9 Twp. 27S Rge. 20W E/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
C SW SW NE


Lease Owner Anador Resources, Inc.
Lease Name EINSEL Well No. 1-9
Office Address 5700 S. Quebec, Englewood, CO 80111
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed 7/4 1981
Application for plugging filed 7/4 1981
Application for plugging approved 7/4 1981
Plugging commenced 7/4 1981
Plugging completed 7/4 1981
Reason for abandonment of well or producing formation
dry hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation Depth to top Bottom Total Depth of Well 4900'
Show depth and thickness of all water, oil and gas formations.

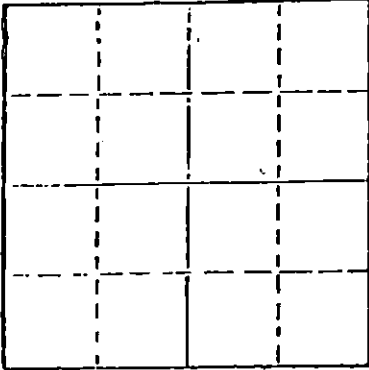

Locate well correctly on above
Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	626'	8-5/8"	626'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

50 sks @ 920'
40 sks @ 630'
10 sks @ 40'
10 sks rathole
50/50 poz., 4% gel, 3% cc
plug down 5:30 PM, 7/4/81

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allen Drilling Company

STATE OF KANSAS COUNTY OF BARTON, ss.
James R. Holley (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James R. Holley
P.O. Box 1389, Great Bend, KS 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of July, 1981



Ruth Brack
Notary Public.

My commission expires

RECEIVED
STATE CORPORATION COMMISSION

JUL 20 1981

CONSERVATION DIVISION
Wichita, Kansas

DRILLER'S WELL LOG

DATE COMMENCED: 06/23/81
DATE COMPLETED: 07/04/81

Anador Resources, Inc.
EINSEL Well No. 1-9
C SW SW NE
Sec. 9, Twp 27S, Rge. 20W,
County: Kiowa, Kansas

ELEVATION: 2283' G.L.
2288' K.B.

4048 - 4072' Shale
4072 - 4182' Lime
4182 - 4192' Lime, shale
4192 - 4570' Lime
4570 - 4745' Lime, shale
4745 - 4823' Shale
4823 - 4900' Chert, lime
4900' RTD

FORMATION DATA:

Heebner 4048'
Toronto 4072'
Brown Lime 4182'
Lansing 4192'
Base KC 4570'
Cherokee 4745'
Mississippi 4823'
RTD 4900'

SURFACE DATA:

Ran 16 jts. 24# new 8-5/8" casing; tally: 618.85';
Set @ 626' w/ 250 sks 60/40 poz., 4% gel, 3% cc.; 150 sks com, 2% gel, 3% c.c. cement. circulated, plug down @ 6:30 PM, 6/24/81 By Sun

PLUGGING DATA:

50 sks @ 920'
40 sks @ 630'
10 sks @ 40'
10 sks rathole
50/50 poz., 4% gel, 3% cc
Plug down 5:30 PM, 7/4/81
By Sun

A F F I D A V I T

STATE OF KANSAS)
COUNTY OF BARTON) ss.

RECEIVED
STATE CORPORATION COMMISSION
JUL 20 1981
CONSERVATION DIVISION
Wichita, Kansas

James R. Holley, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

James R. Holley

Subscribed and Sworn to before me this 15th day of July, 1981.



Ruth Brack
Notary Public