

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Kiowa County. Sec. 21 Twp. 27S Rge. 20W (E) (W)

Location as "NE/CNW/SW" or footage from lines: C NW NW

Lease Owner: Mull Drilling Co., Inc., et al

Lease Name: Einsel Well No. 21-3

Office Address: 1625 Wichita Plaza Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole): Dry Hole

Date well completed: 9-14-64 19

Application for plugging filed: 9-14-64 19

Application for plugging approved: 9-14-64 19


Plugging commenced: 9-14-64 19

Plugging completed: 9-14-64 19

Reason for abandonment of well or producing formation: commercial quantities of oil not found

If a producing well is abandoned, date of last production: 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

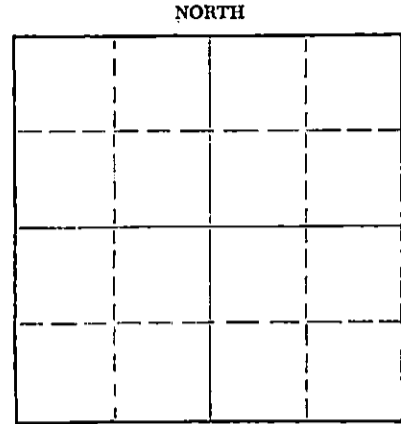

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well: Archie Elving

Producing formation: Depth to top: Bottom: Total Depth of Well 5015' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	601	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set bottom plug @ 400' w/ hulls & 25 sx. cement
Filled hole to 40' w/ mud.
Set top plug @ 40' w/ 10 sx. cement.
Bridged rat hole & 2 sx. cement.

RECEIVED
STATE CORPORATION COMMISSION

SEP 23 1964 9-23-64

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor: Walters Drilling Co.
Address: 510 Orpheum Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK
Robert F. Walters, partner

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert F. Walters

510 Orpheum Building, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 21st day of September 1964

My commission expires October 4, 1967
Juanita M. Green Notary Public.



DRILLER'S LOG

COMPANY: MULL DRILLING CO., INC., ET AL
1625 Wichita Plaza Building
Wichita, Kansas

WELL NAME: EINSEL #21-3
C NW NW Section 21-27S-20W
Kiowa County, Kansas

CONTRACTOR: Walters Drilling Co.
510 Orpheum Building
Wichita, Kansas

ROTARY DRILLING COMMENCED: August 8, 1964
ROTARY DRILLING COMPLETED: September 14, 1964

ELEVATION: 2321 KB
2318 DF
2316 GL

CASING RECORD: 8 5/8" set @ 601' w/ 270 sacks

LOG

0 - 80	Sand
80 - 595	Shale
595 - 605	Sand
605 - 1318	Shale and Shells
1318 - 1336	Anhydrite
1336 - 2035	Shale and Shells
2035 - 2465	Shale and Lime
2465 - 2555	Lime
2555 - 3045	Lime and Shale
3045 - 3150	Shale and Lime
3150 - 3305	Shale-Lime Streaks
3305 - 3580	Shale and Lime
3580 - 3750	Shale and Shells
3750 - 3985	Shale and Lime
3985 - 4270	Lime and Shale
4270 - 4350	Lime
4350 - 4435	Lime and Shale
4435 - 4540	Lime
4540 - 4615	Lime and Shale
4615 - 4720	Lime
4720 - 4848	Lime and Shale
4848 - 4881	Lime
4881 - 4889	Core #1
4889 - 4901	Core #1
4901 - 4916	Core #2
4916 - 4923	Core #3
4923 - 4929	Mississippian Lime
4929 - 4956	Lime
4956 - 4988	Lime
4988 - 5015	Mississippian Lime
5015	Rotary Total Depth - D & A


RECEIVED
STATE CORPORATION COMMISSION

SEP 23 1964

CONSERVATION DIVISION
Wichita, Kansas

The undersigned, Robert F. Walters, hereby certifies, in behalf of said company that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Reports.

WALTERS DRILLING CO.


Robert F. Walters, Partner


STATE OF KANSAS)
) SS.
COUNTY OF SEDGWICK)

BE IT REMEMBERED, that, on this 21st day of September, 1964, before me, the undersigned, a Notary Public duly commissioned in and for the State and County aforesaid, came Robert F. Walters, known to me to be the same person who executed the foregoing instrument as Partner and in behalf of the Walters Drilling Co. and he duly acknowledged the execution of the same for himself and for said company.


IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.

My Commission Expires:

October 4, 1967



Juanita M. Green, Notary Public



RECEIVED
STATE CORPORATION COMMISSION

SEP 23 1964

CONSERVATION DIVISION
Wichita, Kansas