

RECEIVED
STATE CORPORATION COMMISSION

JUL 29 1974


15-155-30221-0000

CONSERVATION DIVISION
Wichita, Kansas

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

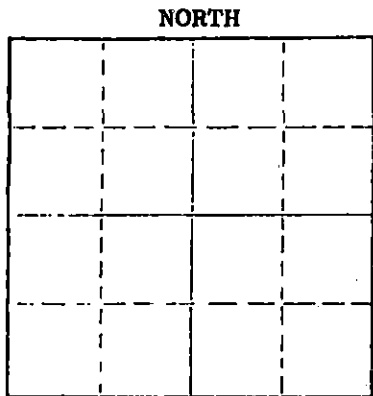

Locate well correctly on above
Section Plat

Reno County, Sec. II Twp. 26 Rge. 6 W (E) (W)
Location as "NE/CNW/SE/SW" or footage from lines C NE SW
Lease Owner A. Scott Ritchie
Lease Name Schrag "B"
Office Address 412 Union Center Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) gas
Date well completed 8-6 1964
Application for plugging filed 7-10 1974
Application for plugging approved 7-11 1974
Plugging commenced 7-24 1974
Plugging completed 7-26 1974
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 4003'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 5 1/2" | | 2,976' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 4003' to 3600'. Dumped 5 sx of cement. Mudded hole to 280'. Made 10' of rock bridge. Dumped 25 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the cello.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
2809 King St. Hutchinson, Kansas 67501
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of July, 1974

My commission expires December 31, 1977

[Signature]
Notary Public.

DRILLER'S LOG

COMPANY: A. Scott Ritchie
 CONTRACTOR: Hellar Drilling Company, Inc.
 LEASE: #2 Schrag "B"
 LOCATION: C NE SW 11-26-6W, Reno County, Kansas
 COMMENCED: July 22, 1964
 COMPLETED: August 6, 1964
 CASING: Set 8 5/8" surface casing @ 255'/175 sacks cement
 Set 5 1/2" pipe @ 4002'

| | |
|-----------|-------------------------|
| 0-170 | Sand Shale & Shells |
| 170-900 | Shale & Shells |
| 900-1020 | Lime & Shale |
| 1020-1074 | Shale |
| 1074-1437 | Lime & Shale |
| 1437-1645 | Shale & Lime |
| 1645-1850 | Shale & Shells |
| 1850-2050 | Shale & lime Shells |
| 2050-2400 | Shale & Lime |
| 2400-2690 | Lime & Shale |
| 2690-2855 | Lime shale & Chert Sand |
| 2855-2955 | Lime & Shale - K.C. |
| 2955-3025 | Lsg. K.C. |
| 3025-3135 | Lime |
| 3135-3185 | Lsg. K.C. |
| 3185-3550 | Lime |
| 3550-3625 | Shale & Lime |
| 3625-3742 | Mississippi |
| 3742-3802 | Mississippi Lime |
| 3802-3816 | Lime |
| 3816-3828 | Shale |
| 3828-4003 | Shale & Lime |
| 4003 | Rotary Total Depth |

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 11 1964
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, D. L. Hellar, do hereby certify that the above and foregoing is a true and correct copy of the log of the #2 Schrag "B", located in C NE SW 11-26-6W, Reno County, Kansas, as reflected by the files of the Hellar Drilling Company, Inc.

HELLAR DRILLING COMPANY, INC.

By D. L. Hellar
 President - D. L. Hellar

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 13th day of August, 1964.

My Commission Expires:
 March 25, 1968

Catherine Darcey
 Notary Public - Catherine Darcey