

STATE CORPORATION COMMISSION

CONSERVATION DIVISION AGENT'S REPORT

RECEIVED
STATE CORPORATION COMMISSION

AUG 5 1974

CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Brock
Administrator
P. O. Box 17027
Wichita, Kansas 67217

Operator's Full Name A. Scott Ritchie 15-155-30221-0000

Complete Address 412 Union Center, Wichita, Kansas 67202

Lease Name Schrag "B" Well No. 2

Location C NE SW Sec. 11 Twp. 26 Rge. 6 (E) (W) X

County Reno Total Depth 4003'

Abandoned Oil Well Gas Well X Input Well SWD Well D & A

Other well as hereafter indicated

Plugging Contractor Art Lamb Casing Pulling Company

Address 2809 King, Hutchinson, Kansas License No. 440

Operation Completed: Hour 4 PM Day 26 Month July Year 1974

The above well was plugged as follows:

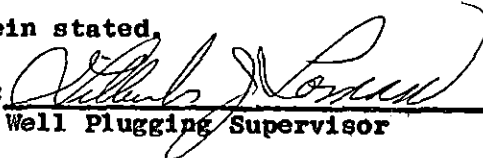
Hole filled with sand to 3600' and cemented with 5 sacks cement.

Hole filled with mud to 280'. Rock bridge set from 280' to 270' and hole cemented with 25 sacks cement. Hole filled with mud to 40'.

Rock bridge set from 40' to 30' and hole cemented to base of cellar with 10 sacks cement.

2976' of 5 1/2" casing recovered.

I hereby certify that the above well was plugged as herein stated.

Signed: 
Well Plugging Supervisor

INVOICED

DATE 8/6/74
INV. NO. 9691-W