

State of Kansas



FORM CP-2

15-155-20758-0000

JOHN CARLIN
R. C. LOUX
JANE T. ROY
PHILLIP R. DICK
CAROL J. LARSON

Governor
Chairman
Commissioner
Commissioner
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
245 North Water
WICHITA, KANSAS 67202

April 24, 1981

VERBAL PERMIT FORM (To be filed by Plugging Agent)

Dear Sir:

Mr. Bud Woodrig of Murfin Drilling Company has this date requested permission to plug the following described well:

Operator's Full Name: Murfin Drilling Company

Complete Address: 617 Union Center, Wichita, Kansas 67202

Lease Name: Abendshein Well No. 1

Location: C NW NW Sec. 11 Twp. 26 Rge. 10 XX (W)

County: Reno Total Depth: 4235'

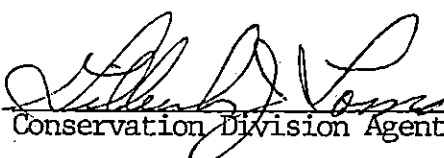
Abandoned Oil Well Gas Well Input Well SWD Well D&A X

Other well as hereafter indicated:

Mr. Woodrig was instructed to plug the well as follows:

8-5/8"-292'-250 sacks common circ. Fill hole with mud. Pump 50 sacks
cement through drill pipe at 530'. Pump 40 sacks cement through drill
pipe at 290'. Fill hole with mud to 40'. Push plug and 1/2 sack hulls
to 40' and cap hole with 10 sacks cement. Cement rathole with 10 sacks
cement. Cement mousehole with 5 sacks cement.

Very truly yours,


Conservation Division Agent

RECEIVED
STATE CORPORATION COMMISSION
APR 29 1981
4-29-81
CONSERVATION DIVISION
Wichita, Kansas