


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Kiowa County, Sec. 1 Twp. 27S Rge. 16W E/W  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines  
S/2 NW NE

Lease Owner Beren Corporation  
Lease Name Ballentine #1 Well No. 1  
Office Address 970 Fourth Financial Center, Wichita, Ks. 67202  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole  
Date Well completed February 29, 1980  
Application for plugging filed February 28, 1980  
Application for plugging approved February 28, 1980  
Plugging commenced 5:00 AM February 29, 1980  
Plugging completed 7:30 AM February 29, 1980  
Reason for abandonment of well or producing formation Dry Hole

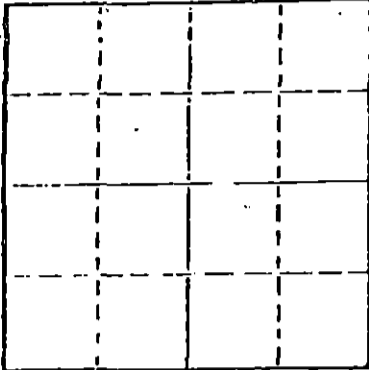

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4587'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	425.59'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud.  
Heavy mud to 420' with 40 sacks 50/50 Pozmix  
thru open ended drill pipe. Solid bridge at  
40' with Howco plug and 10 sacks to surface.  
5 sacks in rathole.

3-11-80

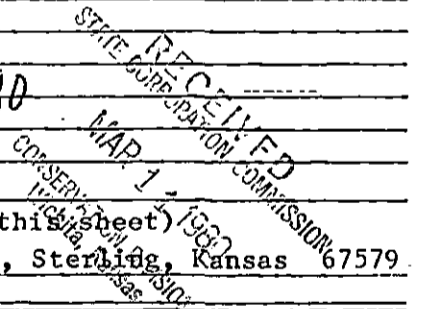

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company, P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE, ss.  
F. A. Wuellner (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

F. A. Wuellner, Secretary  
P. O. Box 129, Sterling, Kansas 67579  
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of March, 1980.



Charles M. Hall  
Charles M. Hall, Notary Public.



My commission expires \_\_\_\_\_

STERLING DRILLING COMPANY  
P. O. Box 129  
Sterling, Kansas 67579

WELL LOG ----- BALLENTINE #1  
Located: S/2 NW NE, Section 1-27S-16W, Kiowa County, Kansas

OWNER: Beren Corporation  
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: February 20, 1980  
COMPLETED: February 29, 1980

TOTAL DEPTH: 4587'

<u>LOG</u>	<u>CASING RECORD</u>
0 - 415 Sand and Clay	Ran 13 joints 8 5/8", 28# OD casing, 411.59'
415 - 1080 Shale	set at 425.59' K.B. Cemented with 300 sacks
1080 - 1093 Anhydrite	60/40 Pozmix with 3% cc and 2% gel. Plug down
1093 - 3340 Lime and Shale	at 5:00 AM, 2-21-80, by Howco.
3340 - 3550 Lime	
3550 - 4050 Lime and Shale	
4050 - 4325 Lime	
4325 - 4470 Lime and Shale	
4470 - 4517 Lime	
4517 - 4540 Mississippi	
4540 - 4587 Lime	Plugged.

Deviation Surveys: 2° at 2255'  
1 1/2° at 4517'

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 11 1980  
CONSERVATION DIVISION  
Wichita, Kansas