


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

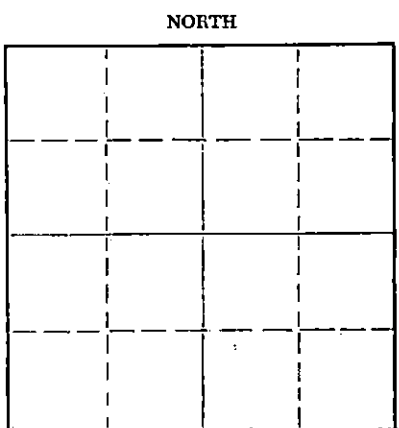

Kingman County, Sec. 14 Twp. 27 Rge. 10 (E) 10 (W)
Location as "NE/CNW/SW" or footage from lines CW/2 - SW - NE
Lease Owner Morganstern & Spector, Inc.
Lease Name Cannon Well No. 5
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 10-29-51 1951
Application for plugging filed Nov. 10, 1959 1959
Application for plugging approved Nov. 12, 1959 1959
Plugging commenced 11-18 1959
Plugging completed 11-22 1959
Reason for abandonment of well or producing formation failure to produce profitably
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel
Producing formation Viola Depth to top 4263 Bottom 4264 Total Depth of Well 4265 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	291	None
				5 1/2	4264	3175.13

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with sand from 4266' to 4250' - dumped 5 sacks of cement - mudded hole to 250' - set 10' rock bridge - dumped 20 sacks of cement - mudded to 30' - set rock bridge - dumped 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
JAN 19 1960
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor R & D Casing Pulling Company License # 236
Address Box 154 Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
Morganstern & Spector, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

(Address)

SUBSCRIBED AND SWORN to before me this 9th day of December, 1959

My commission expires July 18, 1961
Jessie Lee Dunn
Jessie Lee Dunn Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
503 East Murdock, Wichita, Kansas


COPY

Company-LION OIL COMPANY
Farm- Canhon No. 5

SEC. 14 T. 27 R. 10W
C¹/₂ SW NE

Total Depth. 4265
Comm. 10-19-51 Comp. 10-29-51
Shot or Treated.
Contractor. R. W. Rine Drlg Co.
Issued. 2-23-52

County Kingman
KANSAS



CASING:

9 5/8" 291' cem w/250 sx. circ.
5 1/2" 4264' cem w/200 sx.

Elevation. 1731 DF
I.P. Phys. Pump
Production. 112 BOPD / no wtr

Figures Indicate Bottom of Formations.

sand, shale, shells	200
shale	294
red bed, shale	850
shale, shells	1350
lime	1464
lime, shale	1700
lime	1925
lime, shale	2100
shale, lime shells	2400
shale	2625
shale, sand	2800
shale, sand, lime	2975
shale, lime	3515
lime	3595
lime, shale	3680
lime	3785
lime, shale	3860
lime	3930
lime, shale	3993
lime	4004
mississippi	4048
shale	4051
lime, shale	4265
Total Depth	

Tops:	
Lansing	3482
Mississippi	4004
Viola	4263

RECEIVED
STATE CORPORATION COMMISSION

NOV 25 1959

CONSERVATION DIVISION
Wichita, Kansas