


15-155-60003-00-01

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

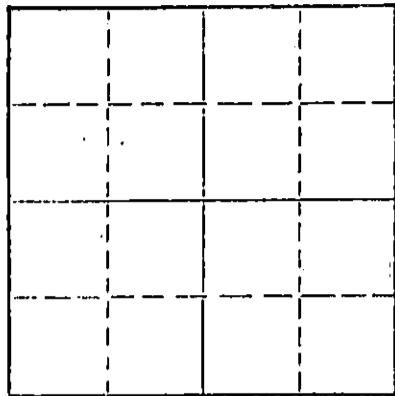

Locate well correctly on above
Section Plat

Reno County, Sec. 30 Twp. 26 Rge. 4 (E) (W) X
Location as "NE/CNW&SW" or footage from lines. NE/NE/NE
Lease Owner Woodman-Iannitti Oil Co.
Lease Name Hilger-Cron (OWWO) Well No. 1
Office Address P. O. Box 308 Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed May 30, 19 73
Application for plugging approved 19
Plugging commenced June 20, 19 73
Plugging completed June 26, 19 73
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? 1/3

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 3291 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	247	-0-
				5 1/2	3307	2789.80'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped sand to 3200' and 5 sacks cement. Shot casing at 3000, 2900 and 2810 ft.
Pulled 88 fts. of 5 1/2" casing. Built a 15 ft. rock bridge at 270'. Dumped 25 sacks cement. Mudded hole to 40'. Capped well with 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
7-3-73
JUL 3 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698 Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

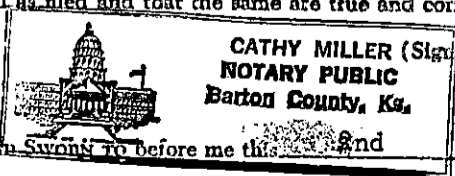

Cathy Miller (Signature) James W. Rockhold
Box 698 Great Bend, Ks. 67530 (Address)
July 1973
Cathy Miller Notary Public

My commission expires 9/30/75