


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Blitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD Strike out upper line when reporting plugging off formations.

Pratt County. Sec. 4 Twp. 29 Rge. 14 (E) (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW/4
Lease Owner Flynn Oil Company
Lease Name Luther Well No. 1
Office Address Thompson Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed May 29, 19 51
Application for plugging filed May 29, 19 51
Application for plugging approved May 29, 19 51
Plugging commenced May 31, 19 51
Plugging completed May 31, 19 51
Reason for abandonment of well or producing formation dry hole
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

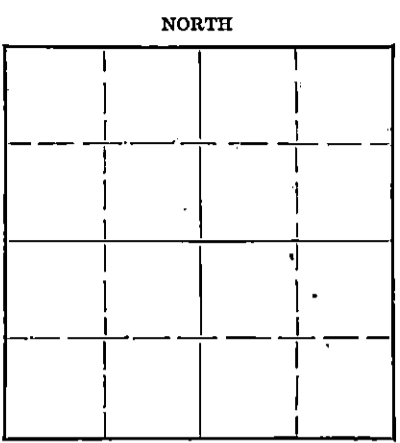

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation none Depth to top Bottom Total Depth of Well 4710 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	315'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged at 225' and cemented with 15 sacks cement
Second plug at 260' and cemented with 10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
JUN - 7 1951
CONSERVATION DIVISION
Wichita, Kansas
06-07-51

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Flynn Oil Company
Address Thompson Building, Tulsa, Oklahoma

STATE OF Oklahoma, COUNTY OF Tulsa, ss.

A. M. Barbour (employee or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. BARBOUR DRILLING COMPANY
(Signature) *A. M. Barbour*

717 First National Bldg., Tulsa, Okla.
(Address)

SUBSCRIBED AND SWORN to before me this 6th day of June, 19 51.

Merry Jane Burt
Notary Public.

My commission expires July 27, 1953

PLUGGING
FILE SEC 4 T 29 R 14 W
BOOK PAGE 85 LINE 13

LUTHER #1
 NW/4 Section 4-29-14
 Pratt County, Kansas
 Flynn Oil Company

8-5/8" O. D. casing cemented at 315'

Drilling Commenced 5-9-51
 Drilling Completed 5-29-51

FROM	TO	FORMATION	REMARKS
0'	90'	Clay & sand	
90	368	Sand & shells	
368	1075	Red bed & shale	8-5/8" O. D. casing cemented
1075	2055	Shale & shells	with 225 sacks bulk cement
2055	2225	Lime & shale	at 315'
2225	2325	Lime	
2325	2410	Lime & shale	Elevation: DF 2022
2410	2500	Lime & sand	Geologist's tops:
2500	2870	Lime & shale	Brown lime 3998
2870	2945	Shale & lime	Lansing 4016
2945	3230	Lime & shale	Mississippi 4482
3230	3325	Shale & lime	Misener 4510
3325	3398	Lime & shale	Viola 4523
3398	3795	Lime	Simpson 4612
3795	3854	Lime & shale	Arbuckle 4682
3854	3910	Shale & lime	
3910	3975	Lime	Drill stem tests: (mud
3975	4009	Lime & shale	#1 4199-4220 Open 45 min. Rec. 30' gas-cut
4009	4080	Shale & lime	#2 4511-4560 Open 30 min. Rec. 80' mud
4080	4480	Lime	#3 4585-4613 Open 30 min. Rec. 10' mud
4480	4512	Lime (Cherty)	#4 4615-4685 Open 1 hour. Rec. 10' mud
4512	4560	Lime	
4560	4583	Cherty lime	
4583	4665	Lime	
4665	4685	Lime & shale	
4685	4710	Lime	Dry hole - well plugged

T. D. 4710'

RECEIVED
 STATE CORPORATION COMMISSION

JUN - 7 1951

This is a true copy of the drillers' log as shown on our drilling tickets.

CONSERVATION DIVISION

Wichita, Kansas

BARBOUR DRILLING COMPANY

[Signature]

Subscribed and sworn to before me this 6th day of June, 1951.

PLUGGING

FILE SEC 4 T 29 R 14

INDEX 85

Merry Jane Burt
 Notary Public

My commission expires July 27, 1953