

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Location as "NE/CNW/SE/SW" or footage from lines _____
Stafford County, Sec. 20 Twp. 25 Rge. 13 (E) (W)X
SE/NW/NW

Lease Owner Leben Oil Corp.
Lease Name Garner Well No. 1
Office Address Box 486 Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 11-9-71 _____ 19____
Plugging completed 11-15-71 _____ 19____
Reason for abandonment of well or producing formation Depleted

NORTH

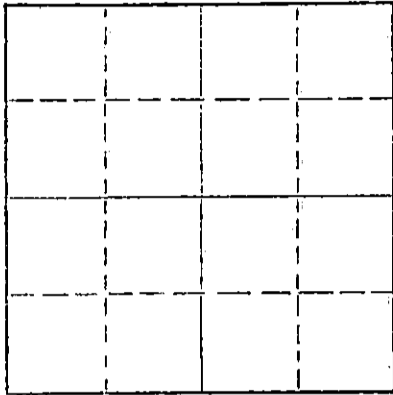

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4366 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	384	None
				5 1/2	4345	3236.96'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed a plug to 4270'. Dumped 20 ft. of sand and 5 sacks cement. Shot at 3500 and 3215'. Broke circulation and spotted 70 bbl. of oil. Build rack and slide. Pulled 60 ft. of casing. Finished pulling pipe. Pulled a total of 104 joints of 5 1/2" casing. Sun squeezed well with 2 sacks hulls, 15 sacks gel and 100 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
NOV 24 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address Box 698 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
Box 698 Great Bend, Kansas 67530
(Address)

My commission expires September 30, 1975
Cathy Miller
Cathy Miller Notary Public.

DRILLER'S LOG

DATE 6-28-69

INVOICE NO. 69-03

COMPANY
 CONTRACTOR
 FARM Lee, et al
 LOCATION Success Place
Wichita, Kansas
 COMMENCED
 COMPLETED

Tilco, et al
 LEBEN DRILLING, INC.
 GARNER #1
 SE NW NW SECTION 20-25S-13W
 STAFFORD COUNTY, KANSAS
 6-16-69 ac. 20-25S-13W
 6-28-69 Stafford County, Kansas

0	220		Sand, Clay	
220	829		Red Bed	
829	846		Anhydrite	
846	1770		Shale	
1770	1990	Total Depth	Shale with Lime Streaks	
1990	2210	Bushing to Ground Level	Lime, Shale Streaks	
2210	2646	Total Depth per Turnkey Agreement	Lime, Shale	\$28,715.62
2646	2930		Shale, Lime Streaks	
2930	3330		Lime, Shale	
3330	4182	Less Cost of Surface Casing	Lime	[664.35]
4182	4225		Lime, Chert	
4225	4245		Cherty Viola	
4245	4300		Cherty Lime	\$28,051.47
4300	4366		Lime	
	<u>4366</u>		<u>RTD</u>	

8 5/8" 20# new surface casing set @ 384 cemented with 285 sacks Common cement, 2% cc


I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Garner #1 Well, located SE NW NW of Section 20, Township 25 South, Range 13 West, Stafford County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite
 Leslie Kite

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 24 1971
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 2nd day of July, 1969.



Ulanda Nichols
 Ulanda Nichols

Expires: