

STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 200 Colorado Derby Building  
 Wichita, Kansas 67202

WELL PLUGGING RECORD  
 K.A.R.-82-3-117

API NUMBER 15-185-22,156-0000

LEASE NAME Kachelman

TYPE OR PRINT  
 NOTICE: Fill out completely  
 and return to Cons. Div.  
 office within 30 days.

WELL NUMBER 1-18

990 Ft. from S Section Line

4290 Ft. from E Section Line

SEC. 18 TWP. 25 RGE. 13 (X) or (W)

LEASE OPERATOR Texas Energies, Inc.

ADDRESS P.O. Box 947 Pratt, Kansas 67124

COUNTY Stafford

PHONE# (316) 672-7581 OPERATORS LICENSE NO. 5087

Date Well Completed 4-13-85

Character of Well D&A

Plugging Commenced 4-13-85

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 4-13-85

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? Dodge City, Kansas

Is ACO-1 filed? Yes If not, is well log attached? \_\_\_\_\_

Producing Formation \_\_\_\_\_ Depth to Top \_\_\_\_\_ Bottom \_\_\_\_\_ T.D. 4380

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
		0	397	8 5/8	4-5-85	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Plugged well with 125 sxs 60/40 poz, 2% gel, 3% cc as follows: 870' - 50 sxs; 420' - 40 sxs; 40' - 10 sxs with solid bridge; rathole - 10 sxs; water well - 15 sxs. Job by Sun Cementing. Plug down at 11pm on April 13, 1985.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Wheatstate Oilfield Services, Inc. License No. 5149

Address P.O. Box 329 Pratt, Kansas 67124

STATE OF KANSAS COUNTY OF PRATT, ss.


Arnie Little

(Employee of Operator) or (Operator) of

above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well, as well as that the same are true and correct, so help me God.

(Signature) Arnie Little

(Address) P.O. Box 329 Pratt, Kansas 67124




SUBSCRIBED AND SWORN TO before me this 7th day of May, 19 85

Mary L. Tjaden  
 Notary Public

My Commission Expires: 3/22/88

RECEIVED  
 STATE CORPORATION COMMISSION  
 5-8-85  
 MAY 08 1985  
 CONSERVATION DIVISION  
 Wichita, Kansas

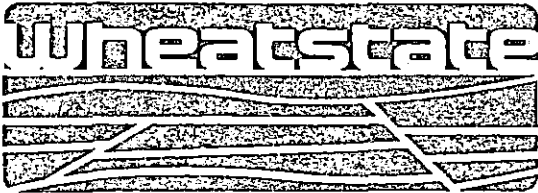

**Oilfield Services, Inc.**

- Rotary Drilling
- Drilling Mud and Chemicals
- Heavy Oil Field Hauling
- Roustabout and Dirt Services
- Well Completion and Servicing Units

DRILLERS' WELL LOG

Kachelman #1-18  
 NE SW SW Sec. 18-25-13W  
 Stafford County, Kansas  
 Commenced : 4-5-85  
 Completed : 4-13-85  
 API# 15-185-22,156  
 Operator : Texas Energies, Inc.

DEPTH		FORMATION	REMARKS
From	To		
0	1990	Sand, Shale	Ran 9 joints (387') new, 24#, 8 5/8" surface casing. Set at 397' with 240 sxs Common, 2% gel, 3%cc. Job by Dowell. Cement did circulate. Plug down at 9:45pm on April 5, 1985
1990	4380	Lime, Shale, TD	RTD 4380'  Plugged well with 125 sxs 60/40 poz, 2% gel, 3%cc as follows: 870' - 50 sxs; 420' - 40 sxs; 40' - 10 sxs with solid bridge rathole - 10 sxs; water well - 15 sxs. Job by Sun Cementing. Plug down at 11pm on April 13, 1985. State Plugger was out of the Dodge City, Kansas office.

STATE OF KANSAS )  
 ) ss  
 COUNTY OF PRATT )

I, the undersigned, being duly sworn on oath, state that the above Drillers' Log is true and correct to the best of my knowledge and belief and according to the records of this office.

RECEIVED  
 WHEATSTATE OILFIELD SERVICES, INC. STATE CORPORATION COMMISSION

MAY 08 1985

*Arnie Little*  
 Arnie Little, Vice-President  
 CONSERVATION DIVISION  
 Wichita, Kansas

NOTARY PUBLIC - State of Kansas  
 MARY L. TJADEN  
 My Appt. Exp. 3/22/88

*Mary L. Tjaden*  
 Mary L. Tjaden, Notary Public

My Commission Expires:

3/22/88