

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-01541-00-01
Spot: SENENW Sec/Twnshp/Rge: 12-25S-13W
4290 feet from S Section Line, 2970 feet from E Section Line
Lease/Unit Name: NORTH LEESBURG Well Number: 103
County: STAFFORD Total Vertical Depth: 4140 feet

Operator License No.: 6679
Op Name: SHORT, W.D. D/B/A SHORT, W. D. OIL
Address: PO BOX 1
OXFORD, KS 67119

Production Casing Size: 6 feet: 4134 WITH 250 SX CMT
Surface Casing Size: 10.75 feet: 280 WITH 210 SX CMT

Well Type: EOR UIC Docket No: E11122.1 Date/Time to Plug: 08/20/2003 10:30 AM
Plug Co. License No.: 6679 Plug Co. Name: SHORT, W.D. D/B/A SHORT, W. D. OIL CO.
Proposal Rcvd. from: W.D. SHORT Company: SHORT, W.D. D/B/A SHORT, W. D. Phone: (620) 455-3576

Proposed Plugging Method: SAND TO 3700' & 6 SX CMT. PLUG AT 750' WITH 15 SX GEL & 75 SX CMT. PLUG AT 310' WITH 75 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY
Date/Time Plugging Completed: 08/20/2003 1:55 PM

WitnessType: Plugging Operations 100% Witnessed (Complete)
KCC Agent: RICHARD LACEY

Actual Plugging Report:


PBTD 3780'. PERFS AT 3752-62'. SAND TO 3700' & 6 SX CMT. RAN TUBING & PUMPED PLUGS THROUGH IT. 1ST PLUG AT 750' WITH 15 SX GEL & 75 SX CMT. 2ND PLUG AT 310' WITH 75 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

RECEIVED
AUG 26 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY UNITED CEMENTING. RECOVERED 1280' OF 6" CASING.

Plugged through: TBG

District: 01

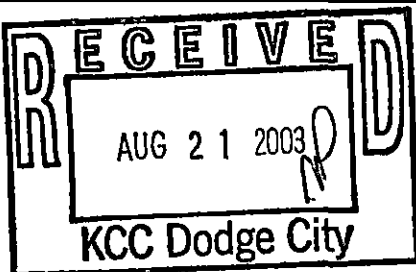

Signed

Richard W. Lacey

(TECHNICIAN)

INVOICED

9-2-03

2004060459

Form SP 2
[Signature]