

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-095-21575-00-00  
Spot: SWNW Sec/Twnshp/Rge: 31-29S-7W  
3300 feet from S Section Line, 4620 feet from E Section Line  
Lease Name: CALKIN Well #: 3  
County: KINGMAN Total Vertical Depth: 4270 feet

Operator License No.: 6236  
Op Name: MTM PETROLEUM, INC.  
Address: 2370 SOUTH STATE ROAD 14 PO BOX  
KINGMAN, KS 67068

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4268		125 SX
SURF	8.625	273		200 SX

Well Type: OG UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/24/2015 5:00 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: (620) 955-6014

Proposed Plugging Method: SAND TO 4130' & 4 SXS CEMENT. 35 SXS @ 1200', 35 SXS @ 750'. CIRCULATE 320' TO 0'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 09/24/2015 5:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE COVERED WITH SAND TO 4090' & CAPPED WITH 4 SKS OF CEMENT. THE CASING WAS RECOVERED FROM 2630' & PULLED TO 1200' WHERE 35 SXS OF CEMENT WAS SPOTTED. PULLED CASING TO 680' AND SPOTTED 35 SXS CEMENT. PULLED CASING TO 320' WHERE CEMENT WAS CIRCULATED TO SURFACE WITH 100 SXS OF CEMENT.

Perfs:


Top	Bot	Thru	Comments
4226	4231	CSG	
4194	4207	CSG	
4180	4186	CSG	

Remarks: QUALITY WELL SERVICE, COMMON CEMENT 3% CACL.

Plugged through: CSG

District: 02

Signed

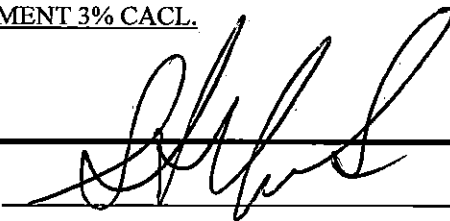

(TECHNICIAN)

OCT 09 2015  
CKM

Received  
KANSAS CORPORATION COMMISSION

Form CP-2/3

OCT 01 2015

CONSERVATION DIVISION  
WICHITA, KS

