

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Stafford County. Sec. 26 Twp. 25 Rge. 13 (E) (W) X

Location as "NE/CNW/SW" or footage from lines: SW SW SE

Lease Owner Koch Exploration Co.

Lease Name Fisher Well No. 2

Office Address 321 West Douglas, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 11/25 1963

Application for plugging filed 7/16 1968

Application for plugging approved 7/17 1968


Plugging commenced 8/7 1968

Plugging completed 8/9 1968

Reason for abandonment of well or producing formation Non-Commercial

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

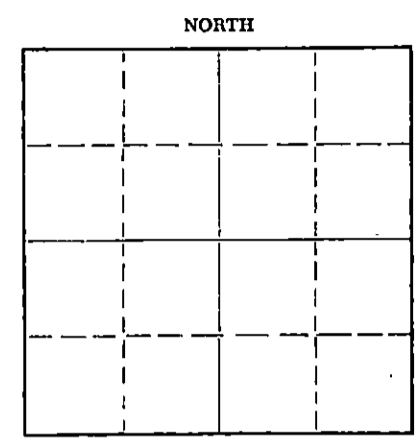

Name of Conservation Agent who supervised plugging of this well Ralph Warren

Producing formation Simpson Sand Depth to top 4231 Bottom 4264 Total Depth of Well 4410 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface	Sand & Clay	0	225	10 3/4	360'	0
Simpson Sand	Sand & Shale	4232	4262	3 1/2 OD	4320'	2800'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped 10 sacks cement w/top & bottem plug to 4200' KB. Pump down pressure 750 PSI. Check plug w/wire line. Mud hole to 340'. Mix & place 35 seck Plug @ 340'. Mud hole to 40' & dump cement plug from 40' to base fo collar w/15 sacks.

RECEIVED
STATE CORPORATION COMMISSION
SEP 4 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Koch Exploration Co.
Address 321 West Douglas, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
KOCH EXPLORATION COMPANY (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. D. Allen
Box 2256, Wichita, Kansas 67203
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of September, 1968

Commission expires 9/25/71

Josephine Meechy
Notary Public

KANSAS GEOLOGICAL SOCIETY
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Rock Island Oil & Refining Co.**
 FARM **Fisher** NO. **2**

SEC. **26** T. **25** R. **13W**
 LOG. **SW SW SE**

TOTAL DEPTH **4410'**
 CDMM. **11-9-63** COMP. **11-25-63**
 SHOT OR TREATED
 CONTRACTOR **Woodman & Iannitti Drilling Co.**
 ISSUED

COUNTY **Stafford**

KANSAS

CASING
 20 10 **3/4" - 350 w/300 cu cement**
 15 8
 12 6
 13 **45" - 4323'**
24" - 4229'

ELEVATION

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

0 -	175	Sand
	700	Red Sand
	810	Anhydrite
	985	Shale
	1088	Shale & Shells
	2505	Lime
	2812	Lime & Shale
	2995	Lime
	3070	Lime & Shale
	3210	Hard Lime
	4118	Lime
	4177	Chert
	4217	Chert & Lime
	4331	Lime
	4410	Artesian

I certify the above to be a true and correct copy of the Driller's log to the best of my knowledge and belief.

WOODMAN & IANNITTI DRILLING CO.

By: *K. T. Woodman*
 K. T. Woodman

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 17 1962
 CONSERVATION DIVISION
 Wichita, Kansas