

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas.


WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plugging  
off formations.

NORTH

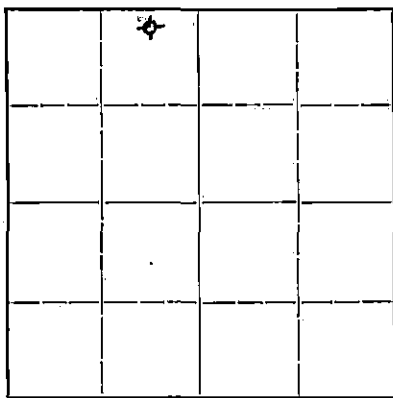

Locate well correctly on above  
Section Plat

Reno County, Sec. 30 Twp. 25S Rge. 4W (E) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines C/N 1/2 NE 1/4 NW 1/4

Lease Owner Rocket Drilling Company

Lease Name Lee Soper Well No. 1

Office Address 609 Orpheum Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed March 15 19 42

Application for plugging filed April 2 19 42

Application for plugging approved April 6 19 42

Plugging commenced April 2 19 42

Plugging completed April 9 19 42

Reason for abandonment of well or producing formation Oil from Viola Lime exhausted  
after producing 2,239 barrels.

If a producing well is abandoned, date of last production March 11 19 42

Was permission obtained from the Conservation Division or its agents before plugging was  
commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation Viola Lime Depth to top 3981' Bottom 3992 Total Depth of Well 4029 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Viola Lime	Oil & water	3981	3992	4 1/2"	3981	1000
				10 3/4	180	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in  
introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to  
.....feet for each plug set.

Put 4 sacks cement in bottom up to 3978 feet. Pipe ripped at 3000 feet. Pumped hole  
full of heavy mud and behind the pipe at 3000 feet. Pipe ripped at 1000 feet and pipe  
pulled. Pumped hole full of heavy mud to 200 feet. Set wood plug at 200 feet and  
mixed 8 sacks of cement and put in above plug. Filled hole to within 8 feet of bottom  
of cellar with heavy mud. Set wood plug 8 feet down and put in cement to bottom of  
cellar.

PLUGGING  
FI. 30 25S-4W  
BO. 30 NE-9-

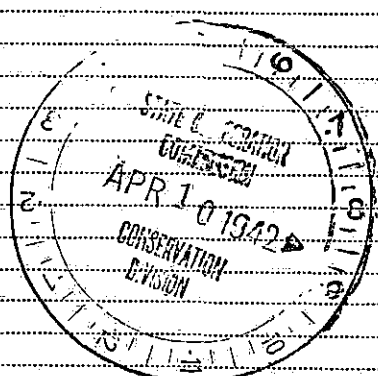

4-10-42

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Rocket Drilling Company  
Address 609 Orpheum Building, Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.

(employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-  
described well as filed and that the same are true and correct. So help me God.

(Signature) S.D. Butcher, Partner  
Rocket Drilling Co.  
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of April 19 42  
Emory Whitcomb  
Notary Public.

My commission expires Nov. 25, 1943

DEEPENING RECORD

Operator: Rocket Drilling Company  
Well: Lee Soper #.1  
Location: C/N $\frac{1}{2}$  NE $\frac{1}{4}$  NW $\frac{1}{4}$  Sec. 30-25S-4W  
County: Reno

Former Total Depth: 3,986'  
Total Depth: 4,029'  
Commenced deepening: 3-11-42  
Completed: 3-15-42  
Initial Production: D&A  
Plugged: 4-9-42


---

Viola Lime                    3986 - 3992  
Simpson Sand                3992 - 4029 - water

Note: Produced 2,239 barrels of oil from Viola Lime from  
3981 to 3986 feet before deepening.

---

STATE OF KANSAS        )  
                                  ) SS  
COUNTY OF SEDGWICK )

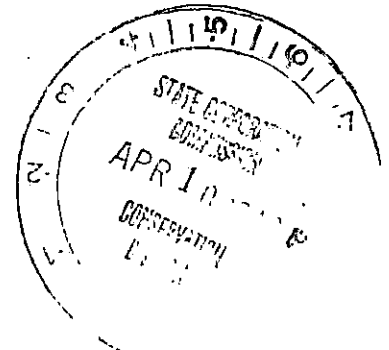

I, the undersigned, being duly sworn on oath, state that the above and within statement is a true and correct record and log of the well drilled on the location above described, to the best of my knowledge and belief.

*S. B. Butcher*

Subscribed and sworn to before me this 10<sup>th</sup> day of April, 1942.

*Emory White*  
Notary Public

My commission expires: Nov. 25, 1943

30-25-4W  
30-9