


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Stafford County, Sec. 13 Twp. 25s Rge. 13w E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
2365' FSL + 1680' FEL
Lease Owner Continental Oil Co.
Lease Name South Leesburg Well No. 303
Office Address Box 267 Great Bend Kansas
Character of Well (Completed as Oil, Gas or Dry Hole) _____

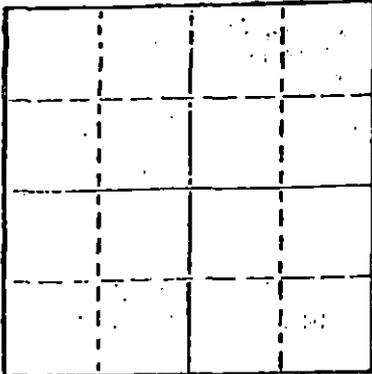

Oil
Date Well completed 9/29 1974
Application for plugging filed 12/5 1976
Application for plugging approved _____ 1976
Plugging commenced 2/4 1977
Plugging completed 2/15 1977
Reason for abandonment of well or producing formation _____

Dry
If a producing well is abandoned, date of last production _____ 1976
8/10
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bud Metz
Producing formation Arb Depth to top 132 Bottom 4135 Total Depth of Well 4135
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	321	8 5/8		
		0	4134	5 1/2		2385

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand to 3550 Dumped 4 sx cement

Pumped top with 3 sx. hulls then 20 sx. jell and 100 sx. cement with 4% jell

RECEIVED
DATE COMPLETION OF _____

MAR 10 1977


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Nicholas Casing Pulling

STATE OF _____ COUNTY OF _____, ss.
(employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George H. Nicholas

(Address) _____

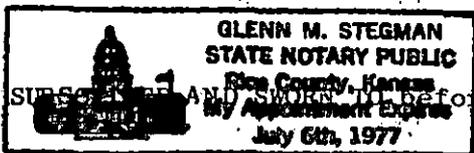

before me this 14th day of March, 19 77

Glenn M. Stegman
Glenn M. Stegman Notary Public.

My commission expires 7/6/77

DRILLERS LOG

Leesburg South Unit No. 303

No. 3 Marion Russell

CASING RECORD: COMPANY: Continental Oil Co. DESCRIPTION:

8 5/8" @ 321.42' CONTRACTOR: Red Tiger Drilling Co. 2,365' from South
 w/150 ex cement 1,080' from East Line

5 1/2" @ 4134' COMMENCED: August 27, 1964 13-250-13W
 w/200 ex cement Stafford Co., Kansas

TOTAL DEPTH: 4135' COMPLETED: September 7, 1964 ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sod & Sand	0	110	
Red Bed & Shale	110	745	
Anhydrite	745	760	
Shale & Shells	760	1620	
Shale & Lime	1620	3535	
Lime	3535	3935	
Lime & Chert	3935	4040	
Chert	4040	4086	
Lime	4086	4135	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Maxine V. Head
Maxine V. Head

Subscribed and sworn to before me this 11th day of September, 1964.

John J. Haller
Notary Public

My Commission Expires:

5-22-66

State Geol. Comm.
Kansas Geol. Society
File

RECORDED
STATE COMMISSION COMMISSIONER

JAN 21 1977

CONCESSIONS SECTION
WICHITA, KANSAS