

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 13 Twp. 25S Rge. (E) 13(W)

Location as "NE/CNW/SW" or footage from lines NW NE SE

Lease Owner Continental Oil Company

Lease Name Leesburg South Unit Well No. 302

Office Address Box 267, Great Bend, Kansas 67530

Character of Well (completed as Oil, Gas or Dry Hole) Salt Water Disposal

Date well completed 2-15 19 43

Application for plugging filed 12-3 19 64

Application for plugging approved 12-4 19 64


Plugging commenced 12-31 19 64

Plugging completed 12-31 19 64

Reason for abandonment of well or producing formation The well stopped taking water.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

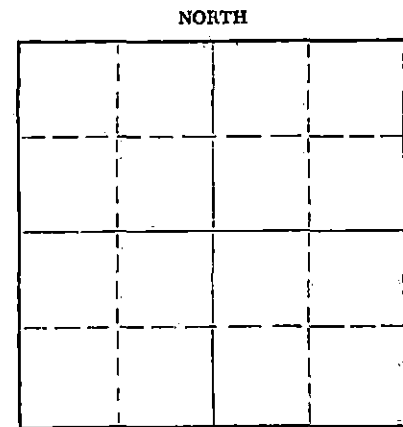

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. A. Elving

Producing formation None Depth to top Bottom Total Depth of Well 4408 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4"	280'	None
				7"	4224'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 10 sacks of Gel and 125 sacks of cement down the 7" and 10 3/4" casing together at zero pressure, then closed the valve on casing and let it set. Measure in to check the top of cement on 1-3-65 and found the cement down 78' from G.L. in 7" casing and down 72' from G.L. between 7" and 10 3/4" casing. The well was completed by filling the 7" casing and the 10 3/4" casing with cement to surface under the supervision of the State Plugger on 1-5-65.

RECEIVED
STATE CORPORATION COMMISSION
JAN 7 1965

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Halliburton Company
Address Great Bend, Kansas
CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
L. E. Powell (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. E. Powell

(Address) January 6, 1965

SUBSCRIBED AND SWORN to before me this 6th day of January, 1965
My commission expires August 16, 1967
Kenneth J. Query Notary Public

