


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Stafford County, Sec. 14 Twp. 25 Rge. 13 E/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
NE SE SE

Lease Owner Ralph G. Bowen
Lease Name Russell #1 Well No. _____
Office Address Hutchinson, Kansas 67501
Character of Well (Completed as Oil, Gas or Dry Hole) _____

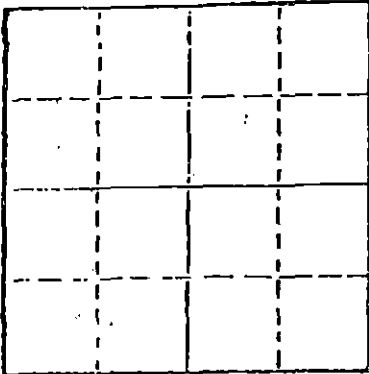

Locate well correctly on above
Section Plot

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 4/12/80 _____ 19____
Plugging completed 4/17/80 _____ 19____
Reason for abandonment of well or producing formation
depleted _____

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Owen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4281
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	225	none
				5 1/2"	4280	1976'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded to 3750' and ran 5 sacks cement. Shot pipe at 3640', 3520', 3395', 3235', 3030', 2830', 2620', 2415', 2205', 2085', 1965', pulled 54 joints. Squeezed hole with 15 sacks gel, 8 sacks hulls, 10 sacks gel. Released plug and displaced with 125 sacks 50-50 pozmix, 4% gel and 3% ccl

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
4-28-80
APR 28 1980

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of April, 19 80

Margaret Melcher
Notary Public.

My commission expires

