


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Reno County Sec. 12 Twp. 25 Rge. (E) 8 (W)

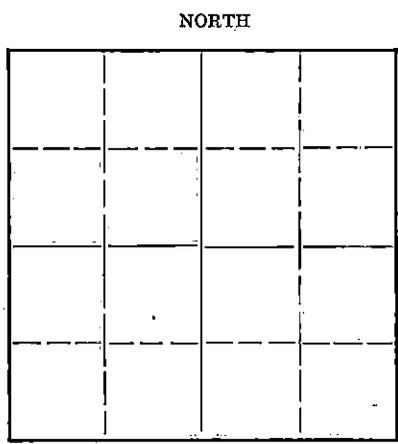

Locate well correctly on above
Section Plat

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SEC.
Lease Owner Lauck & Moncrief
Lease Name Wittt Well No. 1
Office Address Wichita, Kans
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed June 4 19 43
Application for plugging filed June 4 19 43
Application for plugging approved June 4 19 43
Plugging commenced June 4 19 43
Plugging completed June 5 19 43
Reason for abandonment of well or producing formation dry
If a producing well is abandoned, date of last production 19

Name of Conservation Agent who supervised plugging of this well Durkee
Producing formation Arbuckle Depth to top 4264 Bottom 4290 Total Depth of Well 4290 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>Arbuckle</u>	<u>water</u>	<u>4264</u>	<u>4290</u>	<u>10"</u>	<u>180</u>	<u>none</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

heavy mud 4290 - 180'
wood plug 180-175
cement 175-150
heavy mud 150-20
cement 20- 5 bottom cellar

PLUGGING
FILE SEC. 12 TWP. 25 RGE. 8 W
BOOK PAGE 78 LINE 2

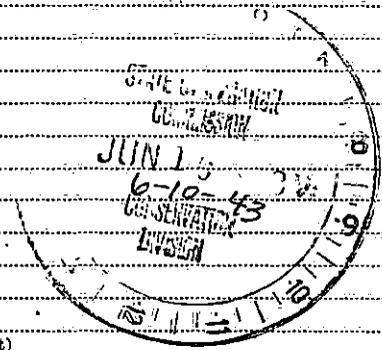

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Lauck & Moncrief
Address 520 Fourth National Bank Bldg. Wichita, Kans.

STATE OF Kansas COUNTY OF Sedgwick, ss.
E. C. Moncrief (Employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. C. Moncrief
520 Fourth Nat'l Bank Bldg. Wichita
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of June 19 43
Elizabeth May
Notary Public.

My commission expires Sept. 14, 1943

LAUCK & MONCRIEF ET.AL

No.1 Witt

Sec. 12 Twp. 25 S. R 8W
Commenced May 8 1943

Reno County Kansas
Completed June 4, 1943

Casing: 10" 180' cemented 145 sacks

Sand	75
red rock	140
gravel	160
red rock	181
red and blue shale	235
red rock & shells	655
shale	872
salt	942
salt & shale	990
shale & shells	1100
chert & lime	1140
lime	1743
broken lime	2012
shale & shells	2108
broken lime	2174
lime & shale	2268
lime	2466
broken lime	2575
shale	2610
shale & lime	2736
lime	2868
lime	3064
broken lime & shale	3135
broken lime	3187
lime	3640
lime & shale	3723
shale	3740
lime	3782
shale	3802
chat	3815
Drill stem test	
packer set	3807
20' mud in 20 minutes	
chat	3896
lime	3933
shale	4139
lime	4145
shale	4164
lime	4177
sand	4190
shale	4253
sand & shale	4264
lime	4290

TOPS

Lansing	3218 (?)
Mississippi	3802
Base Miss.	3933
Viola	4163
Simpson	4177
Arbuckle	4264

Wichita, Kans.

I hereby certify that the above is
a true and correct copy of the log
of the No.1 Witt well.

B.C. Moncrief

Subscribed and sworn to before me
this 9th day of June, 1943

Notary Public

Term expires Sept.14, 1943

dry and abandoned

PLUGGING
FILE SEC. 12 25R 2W
BOOK PAGE 78 LINE 2

