


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH 2

WELL PLUGGING RECORD

Reno County. Sec. 23 Twp. 25 Rge. 8 (E) (W)X
C SE NE

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Okmar Oil Co.
Lease Name Krehbiel Well No. #1
Office Address 1130 Vickers KSB&T Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed 6-5-73 19____
Application for plugging approved _____ 19____
Plugging commenced 6-11-73 19____
Plugging completed 6-13-73 19____
Reason for abandonment of well or producing formation _____

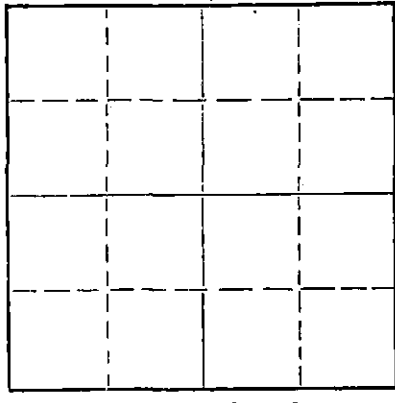

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production: _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3539' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3543'	3023.78'
				8 5/8"	265'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


Made bottom hole plug back with sand to 3350'. Mixed and ran 5 sacks cement thru dump bailer.
Mudded hole to 280' - set 10' rock bridge. Mixed and ran 25 sacks cement thru dump bailer. Mudded hole to 40' - set 10' rock bridge. Mixed and dumped 10 sacks cement to base of cellar.

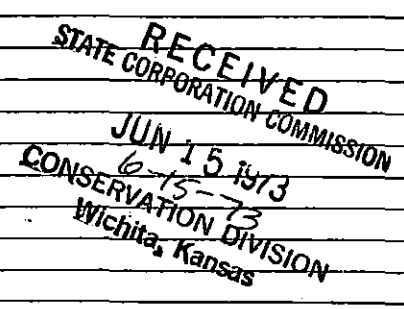

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas
(Address)



Subscribed and sworn to before me this 14 day of June, 19 73
W. Miller
Notary Public.
My commission expires October 1976

GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

RECEIVED
 STATE CORPORATION COMMISSION
 JUN 6 1973
 CONSERVATION DIVISION
 Wichita, Kansas


KREHBIEL #1
 C SE NE, Sec. 23-25S-8W
 Reno County, Kansas

Commenced: April 6, 1973
 Completed: April 16, 1973

OPERATOR: OKMAR OIL COMPANY

Depth From	To	Formation	Remarks
0	25	Sand	Ran 6 jts of used 28# 8 5/8"
25	265	Redbed, shale, shells	csg. set @ 265' cemented w/225
265	450	Redbed, shale	skts of 60/40 Posmix, 2% Gel,
450	1115	Shale, shells	3% CC
1115	2645	Shale, lime	P.D. @ 12:15 AM 4/7/1973
2645	3343	Lime, shale	
3343	3485	Lime	
3485	3539	Dry drill	
3539	TD		Ran 115 jts of used 5 1/2" csg. set @ 3543' cemented w/100 sks common, 3% CC P.D. @ 10:45 PM 4/16/1973


I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for the well drilled in the C SE NE, Section 23-25S-8W, Reno County, Kansas to the best of my knowledge and belief.



STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 19th day of April, 1973, personally appeared James S. Sutton, II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.


 Marjorie Hall, Notary Public


My commission expires
 November 29, 1975