

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Reno County, Sec. 33 Twp. 25 Rge. (E) 4 (W)

Location as "NE/CNW/SW" or footage from lines. CNE/4 - SE/4 - SE/4

Lease Owner Frank J. Black

Lease Name Cohen Well No. 2

Office Address McPherson, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 12-14-49 19

Application for plugging filed 2-2-59 19

Application for plugging approved 2-3-59 19


Plugging commenced 2-8-59 19

Plugging completed 2-14-59 19

Reason for abandonment of well or producing formation Non-commercial

If a producing well is abandoned, date of last production 1-31-59 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

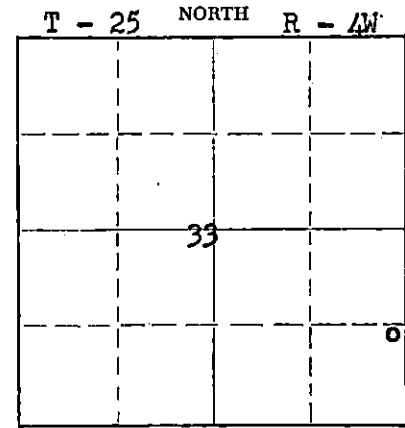

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Fred Hampel

Producing formation Depth to top Bottom Total Depth of Well 4094 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	338	None
				5 1/2	4088	3343.22

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded to 4075' - dumped 5 sks cement - mudded hole to 260' - set 10's rock bridge - dumped 20 sks cement - mudded hole to 35' - set 10' rock bridge - dumped 10 sks cement.

RECEIVED  
STATE CORPORATION COMMISSION

FEB 20 1959

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & D Casing Pulling Company License # 236

Address Box 569 Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF MCPHERSON, ss.  
Frank J. Black (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

SUBSCRIBED AND SWORN TO before me this 19 day of Feb, 19 59

My commission expires Jan 10, 1961

[Signature] Notary Public.

PLUGGING  
FILE SEC. 33 T25 R4W  
BOOK PAGE 14 LINE 11


WELL LOG BUREAU KANSAS GEOLOGICAL SOCIETY  
516 W. Fairbrook, Wichita, Kansas

Company PHILLIPS PETRO.  
Farm Colton No. 2

SEC. 33 T. 25 R. 4W  
NE SE SE

Total Depth. 4094  
Comm. 10-12-49  
Shot or Traced.  
Contractor.  
Date. 2-11-50

County. Reno  
KANSAS



CASINGS:  
8" 338'  
5" 4098'

Location. \_\_\_\_\_

Production. 1757 BOPD

Figures Indicate Bottom of Formations.

clay & red bed	351
shale & shells	741
shale & ch. hyd.	1054
lime & anhyd.	1137
lime & shale	3010
lime	3033
lime & shale	3125
lime	3180
lime & shale	3212
lime	3257
lime & shale	3372
lime	3993
lime & shale	4028
lime	4094
Total Depth	

Schlimbarger Tops:	
Hoebner	2623
Toronto	2542
Brown lime	2875
Lansing K.C.	2842
Mississippi	3617
Kinderhook	3962
Alisner	4066
Viola	4090

PLUGGING  
FILE SEC. 33 T. 25 R. 4W  
BOOK PAGE 14 LINE 11