


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

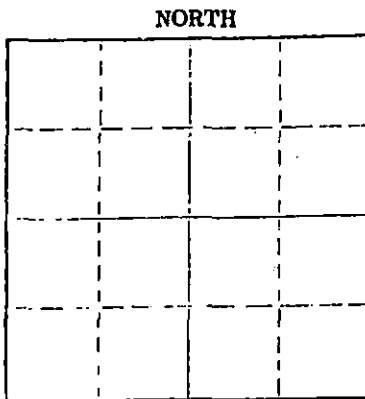

Locate well correctly on above
Section Plat

Stafford County, Sec. 3 Twp. 25 Rge. 14 (E) (W)
Location as "NE/CNW&SW" or footage from lines SE SW NW
Lease Owner Aspen Drilling Company
Lease Name Dykes #1 Well No.
Office Address Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 7/21/75 19
Plugging completed 7/22/75 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4342
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	272	none
				5 1/2	2324	1759'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

~~Checked hole, shot pipe at 1800'~~

Checked hole to 1800' and shot pipe at 1780', pulled 57 joints.

Allied pumped 2 sacks hulls, 10 sacks gel and 150 sacks pos mix.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

JUL 24 1975

Name of Plugging Contractor KELSO CASING PULLING
Address CHASE, KANSAS
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS COUNTY OF RICE
R. DARRELL KELSO (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

CHASE, KANSAS

(Address)

Subscribed and Sworn to before me this 23rd day of July, 1975

My commission expires



Notary Public.

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY Aspen Drilling Company

SEC. 3 T. 25S R. 14W
LOC. SE SW NW

FARM Dykes

NO. 1

COUNTY Stafford

TOTAL DEPTH 4,341'

COMM. January 12, 1974

COMP. January 25, 1974

SHOT OR TREATED

CONTRACTOR H-30, Inc.

ISSUED

KANSAS

CASING

20	10	
15	8-5/8"	272' cemented w/225 sxs cement ELEVATION 1,962 KB
12	6	
13	5 1/2"	2,324' cemented w/35 sxs cement PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand, Shale and Red Bed	274'
Red Bed	1,630'
Red Bed & Shale	1,885'
Lime and Shale	2,015'
Shale and Lime	2,120'
Lime and Shale	2,255'
Shale and Lime	2,568'
Lime and Shale	2,660'
Shale and Lime	2,820'
Lime and Shale	3,085'
Shale and Lime	3,335'
Lime	3,595'
Lime and Shale	3,700'
Lime	3,997'
Lime and Chert	4,053'
Chert, Lime and Shale	4,055'
Lime and Shale	4,070'
Lime and Chert	4,140'
Chert and Lime	4,210'
Lime	4,341'
Rotary Total Depth	4,341'

JUN 2 1975

I hereby certify the above and foregoing
to be a true and correct log of the above
described well as shown by the drilling
reports.

H-30, INC.

Dean Britting
Dean Britting

State of Kansas

County of Sedgwick

ss:

Subscribed and Sworn to before me a Notary
Public in and for said county and state
this 30th. day of January, 1974.

Elsie Willison
Elsie Willison - Notary Public

My Commission Expires:

June 30, 1974