


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

STAFFORD County, Sec. 1 Twp. 25s Rge. 14w (#) (W)

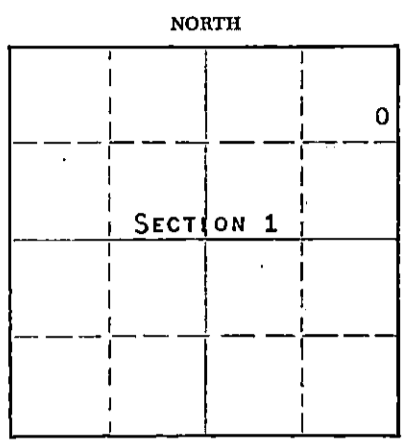

Location as "NE/CNW/SW" or footage from lines SE NE NE
Lease Owner PETROLEUM, INC.
Lease Name GOODMAN "B" Well No. 4
Office Address ROUTE 2, GREAT BEND, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed NOVEMBER 22 19 59
Application for plugging filed NOVEMBER 22 19 59
Application for plugging approved NOVEMBER 22 19 59
Plugging commenced NOVEMBER 22 19 59
Plugging completed NOVEMBER 22 19 59
Reason for abandonment of well or producing formation NO PRODUCIBLE ZONES

If a producing well is abandoned, date of last production NONE 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well FRANK BROADFOOT, ST. JOHN, KANSAS
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4302' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS					CASING RECORD	
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	282'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

MUD UP WITH HEAVY MUD TO 246', PUSHED DOWN 1/4 SACK HULLS TO 246' FOLLOWED BY WOODEN PLUG. PLACED 20 SACKS CEMENT THROUGH DRILL PIPE ON TO PLUG. MUD UP WITH HEAVY MUD TO 35' AND PLACED 1/4 SACK HULLS AT 35' FOLLOWED BY WOODEN PLUG AND 10 SACKS CEMENT TO BASE OF WELL CELLAR.

RECEIVED
STATE CORPORATION COMMISSION
DEC 10 1959
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor GARVEY DRILLING COMPANY
Address ROUTE 2, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
DON SEARLE (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Don Searle
ROUTE 2, GREAT BEND, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 8TH day of DECEMBER, 19 59

My commission expires APRIL 14, 1963
Arthur J. Wiles Notary Public.

WELL LOG

COMPANY **PETROLEUM, INCORPORATED**

SEC. 1 T. 25S R. 14W

FARM **GOODMAN "B" NO. 4**


LOC. SE, NE, NE

TOTAL DEPTH **4302'**

COUNTY **STAFFORD CO., KANSAS**

COMM. **November 9, 1959** COMP. **November 22, 1959**

CONTRACTOR **GARVEY DRILLING COMPANY**



CASING **8 5/8" @ 282' W/225 sax.**

ELEVATION **1950' DF**

PRODUCTION **D & A**

FIGURES INDICATE BOTTOM OF FORMATIONS

75	Surface soil & sand
145	Gravel & clay
855	Shale & red bed
875	Anhydrite
1265	Shale & shells
1850	Shale, shells & lime
2225	Lime
2515	Lime & shale
2940	Shale
3280	Shale & lime
3400	Lime & shale
3475	Lime
3635	Lime & shale
3670	Shale
3885	Lime
3970	Lime & shale 1/2
4048	Shale & chert
4090	Shale
4147	Shale & cherty lime
4204	Cherty lime
4207	Lime
4238	Lime & chalky shale
4290	Shale & sand
4302	Lime
4302	T. D.

State of KANSAS
 County of BARTON } ss:

I, VERNE A. MORRIS of GARVEY DRILLING COMPANY

upon oath state that the above and foregoing is a true and correct copy of the log of the #4 GOODMAN "B" well.

Verne A. Morris

Subscribed and sworn to before me this 4th day of December 19 59

My Commission Expires: April 14, 1963

Arthur J. Wiles
 NOTARY PUBLIC

