


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Stafford County. Sec. 9 Twp. 25 Rge. 11 (E) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NW C NW
Lease Owner Zephyr Drilling Company
Lease Name Knop Well No. 25
Office Address Box 977, Tulsa, Okla.
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed April 2, 1943 19 43
Application for plugging filed April 21, 1943 19
Application for plugging approved April 21, 1943 19
Plugging commenced April 21, 1943 19
Plugging completed April 21, 1943 19
Reason for abandonment of well or producing formation Drill pipe in hole



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander
Producing formation Depth to top Bottom Total Depth of Well 3323 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
		0	208'6"	8 5/8	208'6"	none
	Drill Pipe lost in well			4 1/2" D.P.	3123'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
W Drill fluid and Drill Pipe 3323 to 200'
Bridge at 200 ft.
Cement 15 sx to 26'
cement to top

PLUGGING
FILE SEC 9-25R 11-10
BOOK PAGE 25 LINE 18

5-29-43

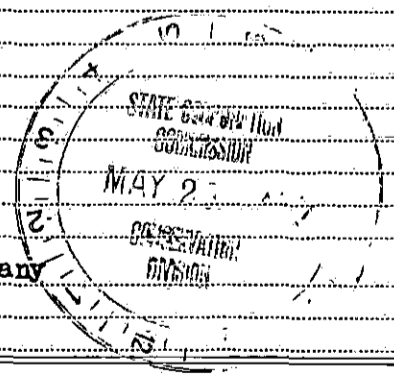

(If additional description is necessary, use BACK of this sheet).
Correspondence regarding this well should be addressed to Zephyr Drilling Company
Address P.O. Box 977, Tulsa, Oklahoma.

STATE OF Oklahoma, COUNTY OF Tulsa, ss.

(employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Handwritten Signature] (Address)

SUBSCRIBED AND SWORN TO before me this 28th day of May, 1943

My commission expires December 18, 1946
Notary Public.

ZEPHYR DRILLING COMPANY, ET AL

C. J. KNOP WELL NO. #2

SEC. 9-25S-11W

STAFFORD COUNTY, KANSAS

Casing Record

Date Drilling Commenced: March 24, 1943 Set 208' 6" 8-5/8" O.D. Surface Casing,
Date Drilling Ceased: April 2, 1943 cemented w/140 sacks cement.

0	105	Sand
105	165	Red bed
165	227	Lime shells and red rock
227	340	Red Rock
340	450	Red rock and shale
450	510	Anhydrite
510	710	Shale and shells
710	1165	Lime and shale
1165	1525	Shale, shells & salt
1525	1970	Lime and shale
1970	2100	Sandy shale and lime
2100	2275	Shale and shells
2275	2430	Lime and sandy shale
2430	2525	Shale and shells
2525	2645	Shale
2645	2735	Lime and shale
2735	2845	Lime
2845	2955	Lime and shale
2955	3323	Lime - Topeka
	3323	T. D.

I certify that the information given herewith is a true and complete record of the above well, so far as can be determined from available records.

ZEPHYR DRILLING COMPANY

By

Tulsa, Oklahoma
May 15, 1943

