


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

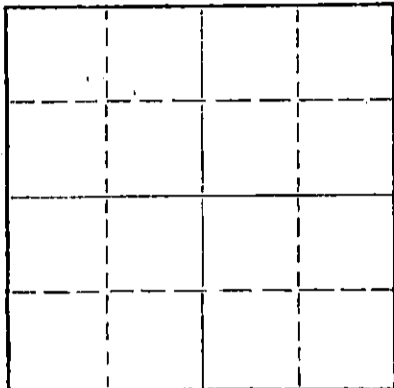

Locate well correctly on above
Section Plat

Edwards County, Sec. 3 Twp. 26 Rge. 16 (E) (W)

Location as "NE/CNW/SW" or footage from lines C W/2 NE/4

Lease Owner Specter Pipe & Supply, Inc.

Lease Name Monaghan Well No. 1

Office Address Box 169, Russell, Kans.

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed 5-1-59 19

Application for plugging filed 5-28-69 19

Application for plugging approved 5-29-69 19

Plugging commenced 6/28 19 69

Plugging completed 7/7 19 69

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren

Producing formation Kinderhook Depth to top 4420' Bottom 4472' Total Depth of Well 4473 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8"	424'	none
				5 1/2"	4473'	3028.88'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged back to 3900 with sand, dumped 5 sacks cement, set 10' rock bridge at 300', dumped 25 sacks cement, mudded to 40', set 10' rock bridge, dumped 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
JUL 14 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling Co
Address Rt 4, Great Behd, Kans.

STATE OF Kansas, COUNTY OF Russell, ss.
Specter Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 9th day of July, 1969

Wilma M. Lindahl, Notary Public.

My commission expires May 21, 1971

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


15-647-10019-0000
COPY

Company- AMBASSADOR OIL CORP.
Farm- Monaghan No. 1

SEC. 3 T. 26 R. 16W
C W/2 NE

Total Depth. 4473'
Comm. 4-25-59 Comp. 5-1-59
Shot or Treated.
Contractor. Chief Drlg.
Issued. 6-17-61

County Edwards
KANSAS



CASING:
8" 424'
5" 4473'

Elevation. 2079' RB

Production. 93 BOPD

Figures indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE:

TOPS: SCOUT
Charokee 4375
Conglomerate 4405
Kinderhook 4420
Total Depth 4473

RECEIVED
STATE CORPORATION COMMISSION
MAY 29 1969
CONSERVATION DIVISION
Wichita, Kansas