


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit,
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

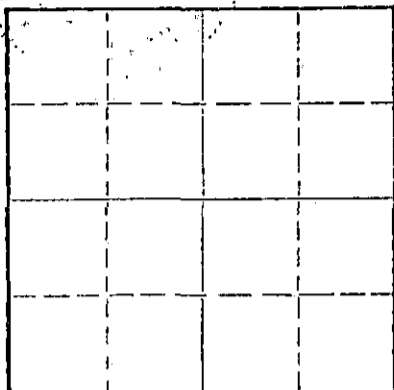

Locate well correctly on above
Section Plat

Edwards County. Sec# 2 Twp. 26 Rge. 16 (E) (W)
Location as "NE/CNW/SW" or footage from lines C NW SW
Lease Owner SPECTER PIPE AND SUPPLY, INC.
Lease Name BRYANT "A" Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 4-17-59 19__
Application for plugging filed May 28, 1969 19__
Application for plugging approved May 29, 1969 19__
Plugging commenced 6/22/69 19__
Plugging completed 6/28/69 19__
Reason for abandonment of well or producing formation failure to produce profitably
If a producing well is abandoned, date of last production 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well RALPH J. WARREN
Producing formation Viola Depth to top 4474 Bottom 4485 Total Depth of Well 4485 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	425 ft.	none
				5 1/2" OD	4485 ft.	2566 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged, back to 3900- feet, dumped 5- sacks Cement.
Mudded hole up to 300- feet, Set a ten -foot Rock Bridge.
Dumped 25- sacks Cement, Mudded hole up to 40- feet.
Set a rock Bridge, ten sacks on top.

RECEIVED
STATE CORPORATION COMMISSION
JUL 7 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor LYNCH CASING PULLING, COMPANY NO. 457
Address RT. R# 4 GREAT BEND, KANSAS, 67530

STATE OF Kansas, COUNTY OF Russell, ss.
Specter Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

Subscribed and Sworn to before me this 3rd day of July, 1969
[Signature]
Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company: AMBASSADOR OIL CORP.
Farm: Bryant "A" No. 1

SEC. 2 T. 26 R. 16W
C NW SW

Total Depth: 4485'
Comm. 3-12-59 Comp. 4-17-59
Shot or Treated.
Contractor: Chief Drig.
Issued: 6-17-61

County: Edwards
KANSAS



CASING:
8" 425'
5" 4485'

Elevation: 2065' RB

Production: 64 BOPD

Figures indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE:

TOPS: SCOUT	
Anhydrite	1045
Lansing	3923
Base Kansas City	4232
Cherokee Sand	4356
Kinderhook Sand	4398
Viola	4474
Total Depth	4485

RECEIVED
STATE CORPORATION COMMISSION
MAY 29 1969
CONSERVATION DIVISION
Wichita, Kansas