


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Stafford County. Sec. 5 Twp. 25S Rge. (E) 14(W)
Location as "NE/CNW%SW%" or footage from lines NE NE NW

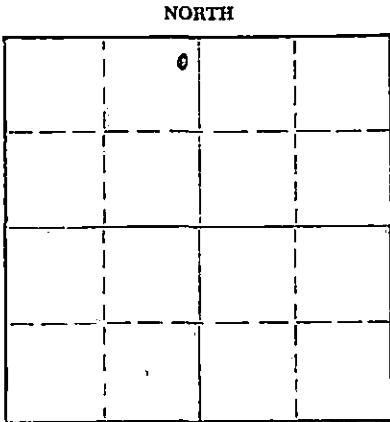

Lease Owner Newman's Inc.
Lease Name #1 Wilson Well No. 1
Office Address 700 Petroleum Club Building - Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 10-9-66 19
Application for plugging filed 10-9-66 19
Application for plugging approved 10-9-66 19
Plugging commenced 9:00 P.M. 19
Plugging completed 11:00 P.M. 10-9-66 19
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production none 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving - Pratt Kansas
Producing formation none Depth to top _____ Bottom _____ Total Depth of Well 4395 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Shale & Lime Cherty		0	276	8 5/8"	276	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole filled to 80' Set plug and hulls at 240' with 25 sacks through pipe
Fill hole to 40' Set plug & Hulls Bridge to hold kelly hole.
Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
OCT 11 1966
CONSERVATION DIVISION
Wichita, Kansas

10-11-66

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor B & B DRILLING INC.
Address 548 Petroleum Building, - Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
B & B Drilling Inc. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Lahan President

548 Petroleum Building - Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of October, 19 66

My commission expires May 31, 1970

Alma A. Meiser
Notary Public.

B & B DRILLING, INC.

548 Petroleum Building

Wichita, Kansas 67202

October 10, 1966

RECEIVED
STATE CORPORATION COMMISSION

OCT 11 1966

CONSERVATION DIVISION
WICHITA, KANSAS

DRILLERS LOG

COMPANY: Newman's Inc.
CONTRACTOR: B & B Drilling Inc.
TOTAL DEPTH: 4395'
COMMENCED: September 29, 1966
COMPLETED: October 9, 1966

Re: #1 Wilson
NE NE NW
Sec. 5-25S-14W
Stafford Co., Kansas

0	190	Sand		
190	300	Sand & Shale		
300	440	Clay & Shale		
440	913	Red Bed	907	Anhydrite
913	926	Anhydrite		
926	1310	Shale Red Bed		
1310	1830	Shale		
1830	2055	Lime & Shale		
2055	2565	Shale & Lime		
2565	3350	Shale & Lime		
3350	3740	Lime & Shale	3564	Hebner
3740	3920	Lime & Shale	3732	Kansas City
3920	4031	Lime & Shale	4120	Mississippi
4031	4140	Lime & Shale		
4140	4166	Chert & Lime		
4166	4278	Lime & Chert	4187	Kinderhook
4278	4293	Lime & Chert	4244	Viola
4293	4360	Shale & Lime	4316	Simpson
4360	4395	Total Depth	4378	Arbuckle

We certify the above and foregoing to be true and correct copy of the log on the #1 Wilson, located in Stafford County, Kansas

Bill Zahara President

Alma A. Neises Notary Public

Subscribed and sworn to before me this 10th day of October, 1966
My Commission expires May 31, 1970