


STATE OF KANSAS  
STATE CORPORATION COMMISSION

15-051-0485 7-0000 Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

NORTH

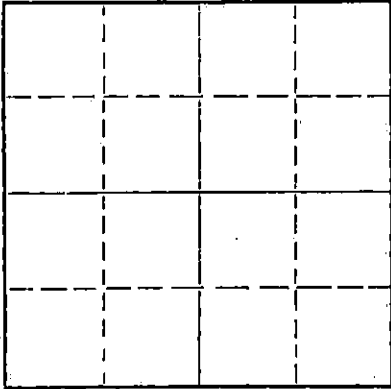

Locate well correctly on above  
Section Flat

Ellis County. Sec. 15 Twp. 11 Rge. 18 (E) (W) x  
Location as "NE/CNW&SW&" or footage from lines SW SW SW  
Lease Owner K & G Oil Co.  
Lease Name Henderson "B" Well No. #2  
Office Address Box 623, Plainville, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 4-29-66 19  
Application for plugging approved 19  
Plugging commenced 5-6-66 19  
Plugging completed 5-13-66 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 3478' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3050', mixed and ran 5 sacks cement thru dump bailer.  
Mudded hole to 450', set 15' rock bridge. Muxxed hole to 40', mixed and ran 10 sacks of cement to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 17 1966  
5-17-66  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co., Inc.  
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec  
Box 364, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 16 day of May, 1966

My commission expires 24 October 1968  
Sidney D. Miller  
Notary Public.

WELL LOG BUREAU KANSAS GEOLOGICAL SOCIETY  
 508 E. Murdock, Wichita, Kansas

15-051-04857-00-00


Company - MAZDA OIL CO.  
 Farm - Henderson "E" No. 2

SEC. 15 T. 11 R. 18W  
 SW S / SW

Total Depth. 3479  
 Comm. 11-19-49 Comp. 12-5-49  
 Shot or Treated.  
 Contractor.  
 Issued. 8-26-50

County. Ellis

KANSAS



Elevation. 1926

Production. Pot. 100 bbls.

CASING:  
 8 5/8" 1207 cem. w/500 sx.  
 5 1/2" 3474 cem. w/100 sx.

Figures indicate Bottom of Formations.

shale & shells	325
shale	495
sand & shale	700
sand	900
sand & shale	950
shale & red rock	1205
amyd.	1240
red rock & shale	1340
shale & shells	1470
shale sdy.	1560
shale & salt	1875
shale & lime	3025
lime	3405
congl., lime	3435
lime	3476
lime	3479
Total Depth	