


15-047-00073-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

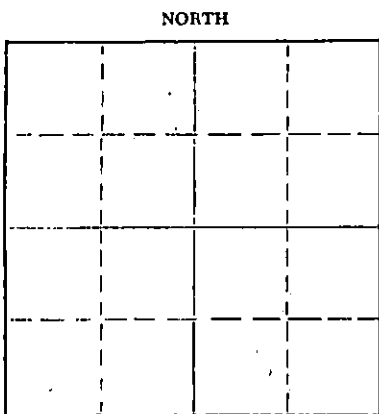

Locate well correctly on above
Section Plat

Edwards County, Sec. 9 Twp. 26 Rge. 16 (NW) (W)
Location as "NE/CNW/SE/SW" or footage from lines NW NW SW
Lease Owner Wichita Iron & Metal
Lease Name Welsch Well No. 1
Office Address Box 2421 Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil & Gas
Date well completed 12/4/58
Application for plugging filed March 3 19 66
Application for plugging approved March 4 19 66
Plugging commenced March 28 19 66
Plugging completed 3/31 19 66
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production Feb 19 66
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation Mississippi Depth to top _____ Bottom _____ Total Depth of Well 4496' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0	239	8 5/8	239	none
Kinderhook		0	4493	5 1/2	4493	2924'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with sand from 4496' to 4375'. Run 5 sacks of cement from 4375' to 4345'. Set plug at 239'. Rock from 239' to 229'. Run 5 sacks of cement from 229' to 214'. Bailed out oil & water. Run 20 sacks of cement from 214' to 154'. Mudded from 154' to 30'. Run 10 sacks of cement from 30' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

APR 8 1966

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn & Smith Pipe Pulling Co.
Address Box 156 Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Ray Stekoll (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wichita Iron & Metal
by Ray Stekoll - Box 13021 - Wichita, K.
(Address)

SUBSCRIBED AND SWORN TO before me this 7 day of April, 19 66

My commission expires August 21, 1967
Lugene E. Martin
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock, Wichita, Kansas


15-647-00073-0000

Company- LEBEN DRILLING, INC.
Farm- Welsch No. 1

SEC. 9 T. 26 R. 16W
NW NW SW

Total Depth. 4496'
Comm. 11-21-58 Comp. 12-4-58
Shot or Treated.
Contractor. Leben Drig., Inc.
Issued. 2-7-59

County Edwards
KANSAS



Elevation. 2083' KB

Production. 10,000,000 CFG

CASING:

8 5/8" 239' cem w/200 sx.

Figures Indicate Bottom of Formations.

surface clay sand	30
sand & shale	175
shale	239
shale & sand	420
shale, shells & sand	1020
shale	1055
Anhydrite	1075
shale	1500
shale & shells	2080
lime	2385
lime & shale	2495
shale	2615
shale & shells	2855
shale	2985
shale & shells	3115
lime & shale	4025
lime	4400
lime & chert	4425
lime, chert & sand	4440
lime	4496 RTD
Total Depth	

TOPS:

Anhydrite	1055
Heebner	3765
Toronto	3783
Douglas	3803
Brown Line	3910
Lansing	3929
Base Kansas City	4189
Ft. Scott	4381
Mississippi	4392
Kinderhook Sand	4429
Kinderhook Shale	4471
Viola	4488

RECEIVED
STATE CORPORATION COMMISSION

APR 8 1966

CONSERVATION DIVISION
Wichita, Kansas