

15-155-3003-0000

30027 Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

Reno County, Sec. 13 Twp. 26 Rge. 9W (E) (W)

Location as "NE/CNW/SW" or footage from lines R C SE/4

Lease Owner Robert F. White

Lease Name Snell #1 Well No.

Office Address Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 3/12/71 19

Plugging completed 3/16/71 19

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

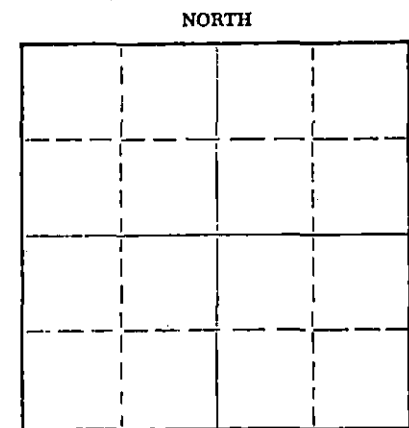

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Toman

Producing formation Depth to top Bottom Total Depth of Well 2412 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	298	none
				5 1/2"	2412'	1605'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bled gas from well, pumped in two loads of water, well still gassing. Checked hole to 2412', ran sand to 2340', dumped 5 sacks of cement, loaded hole, shot pipe at 1606', pulled 12 joints, gas came in. Filled hole with water, didn't do any good, called United Cementing Co. and pumped 10 sacks of weight mud with no results. Pulled balance of pipe. Set rock bridge at 200', dumped 25 sacks of cement. Mudded to 40', set rock bridge and dumped 10 sacks of cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
MAR 24 1971
CONSERVATION DIVISION
Wichita, Kansas

3-24-71

Name of Plugging Contractor (If additional description is necessary, use BACK of this sheet) KNIGHT CASING PULLING CO., INC.

Address CHASE, KANSAS


STATE OF KANSAS, COUNTY OF RICE, ss.

NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight

CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN to before me this 17th day of March, 1971



2/15/75

My commission expires

Notary Public.

DRILLER'S LOG

COMPANY: Inger Oil Company, - Jones-Gebert Oil, Inc.
 CONTRACTOR: Navajo Drilling Co.
 FARM: #1 Snell, C SE/4 Section 13-26S-9W,
 Reno County, Kansas
 COMMENCED: 6/4/64
 COMPLETED: 6/19/64
 CASING: 8-5/8" casing at 298 with 225 sx.

~~15-155-30093-0000~~
 30027

0	-	298	Surface hole
298	-	1305	Shale and sand
1305	-	1566	Shale and lime
1566	-	1810	Lime
1810	-	2075	Lime and shale
2075	-	2187	Shale and sand
2187	-	2253	Shale and sand
2253	-	2382	Shale, lime and sand
2382	-	3055	Lime and shale
3055	-	3233	Lime and shale
3233	-	3325	Lime
3325	-	3790	Lime
3790	-	3872	Lime and shale
3872	-	3913	Mississippi (chert)
		3972	Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 26 1971
 CONSERVATION DIVISION
 Wichita, Kansas
 1-26-71


I, Barbara J. Layton, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Snell, C SE/4 Section 13-26S-9W, Reno County, Kansas, as reflected by the files of Navajo Drilling Co.

Barbara J. Layton

 Barbara J. Layton

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 30th day of June, 1964.



Lois J. McCoy

 Lois J. McCoy, Notary Public

My commission expires:
 January 8, 1968