

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Reno County, Sec. 36 Twp. 26S Rge. 8 (E) W (W)
C SW SW

Location as "NE/CNW&SW" or footage from lines _____
Lease Owner Wm. H. Pine
Lease Name McCullough Well No. 1
Office Address McCullough Building, Okmulgee, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed _____ 11-28 19 64
Application for plugging filed _____ 11-28 19 64
Application for plugging approved _____ 11-28 19 64
Plugging commenced _____ 11-28 19 64
Plugging completed _____ 11-28 19 64
Reason for abandonment of well or producing formation Dry Hole

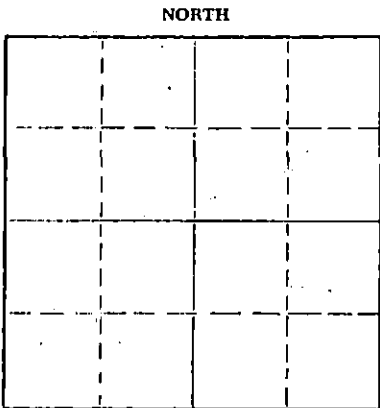

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3705 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	201'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole filled with heavy rotary mud to 190 ft. Bridge at 190 ft. with 25 sacks cement. Hole filled with mud to 40 ft. Bridge at 40 ft. with 10 sacks cement. Rathole capped with 2 sacks cement.

12-9-64

RECEIVED
STATE CORPORATION COMMISSION

DEC 9 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor White & Ellis Drilling, Inc. License #209
Address Box 448, El Dorado, Kansas

STATE OF Kansas COUNTY OF Butler, ss.
Ernest Sifford, employee of contractor (employee or owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ernest Sifford
Box 448, El Dorado, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 4th day of December, 19 64

My commission expires September 26, 1968 J. B. Quis Notary Public.

Casing Record

15-155-60002-0000

Location: C SW SW
 Section: 36-26S-8W
 Reno County, Kansas
 Farm: McCullough #1
 Well Owner: Wm. H. Pine
 Contractor: White & Ellis
 Drilling, Inc.
 Commenced: 11-19-64
 Completed: 11-28-64

8 5/8 201' Cemented
 w/ 185 sacks

T. D. 3705'

Kelly Bushing Measurement 5' above ground level.

FORMATION	DEPTH
Sandy Shale	0-100
Lime & Shale	201
Shale & Shells	1085
Lime & Shale	1575
Lime & Shale stks.	1835
Lime & Shale	2515
Shale	2575
Lime & Shale	2690
Lime	3035
Shale	3215
Sand	3230
Lime	3250
Shale	3260
Lime	3705

TOPS

Topeka	2690
Lansing	3260
Kansas City	3260
Kansas City	3407

Dry Hole, Plugged

& Abandoned

12-9-64
 RECEIVED
 STATE CORPORATION COMMISSION
 DEC 9 1964
 CONSERVATION DIVISION
 Wichita, Kansas