


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

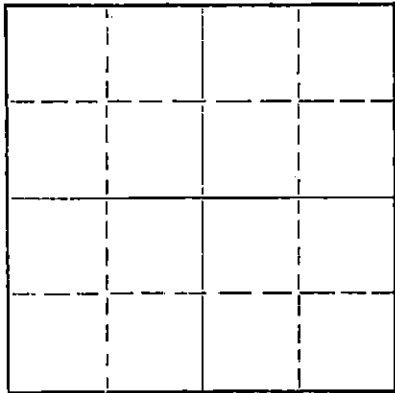

Locate well correctly on above  
Section Plat

15-047-10109-0000

Edwards County, Sec. 21 Twp. 26 Rge. 16 (E) (W)  
Location as "NE/CNW/SW" or footage from lines C NW SE  
Lease Owner Sitrin Oil Co., Inc.  
Lease Name Schultz #A2 Well No.  
Office Address Great Bend, Kansas 67530  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 3/13/70 19  
Plugging completed 3/20/70 19  
Reason for abandonment of well or producing formation depleted.  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein  
Producing formation Depth to top Bottom Total Depth of Well 4495 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	325'	none
				5 1/2"	4480'	3397'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 4495', ran sand to 4460' and ran 5 sacks of cement.  
Loaded hole with 3 loads water, shot pipe at 3389', worked pipe loose  
and pulled 109 joints. Bailed hole to 250', set 10' rock bridge  
and ran 25 sacks of cement. Mudded hole to 40', set 10' rock bridge  
and ran 10 sacks of cement. Tallied pipe.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 17 1970  
CONSERVATION DIVISION  
Wichita, Kansas

4-17-70

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PLUGGING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described  
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the  
above-described well as filed, and that the same are true and correct. So help me God.

(Signature)

CHASE, KANSAS

(Address)

SUBSCRIBED AND SWORN to before me this 24TH day of March, 1970

My commission expires 2/15/71

Notary Public.

COP

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

15-047-10109-0000

Company L. C. SMITHERMAN  
Farm Schultz

No. 2

SEC. 21 T. 26 R. 16W  
C NW SE

Total Depth. 4495'

Comm. 10-6-59


Comp. 10-26-59

Shot or Treated.

Contractor.

Issued. 6-24-61

County Edwards  
KANSAS



CASING:  
8" 325'  
5" 4480'

Elevation. 2081'

Production. 263 BOPD

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE:

TOPS: SCOUT	
Heebner	3818
Toronto	3838
Douglas	3856
Brown Lime	3976
Lansing	3989
Base Kansas City	4336
Fort Scott	4456
Cherokee Shale	4462
No Cherokee Sand	
Conglomerate	4479
Total Depth	4495

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 13 1970  
CONSERVATION DIVISION  
Wichita, Kansas