

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-101-22495-00-00  
Spot: SWSESENW Sec/Twnshp/Rge: 1-18S-29W  
2811 feet from S Section Line, 3211 feet from E Section Line  
Lease Name: PECK 1 Well #: 2  
County: LANE Total Vertical Depth: 4665 feet

Operator License No.: 34158  
Op Name: O'BRIEN RESOURCES, LLC  
Address: PO BOX 6149  
SHREVEPORT, LA 71136

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4175		WITH 2 SX CMT
DVT	4.5	2150		WITH 370 SX CMT
PROD	4.5	4660	0	WITH 350 SX CMT
SURF	8.625	266		WITH 175 SX CMT

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/06/2015 11:00 AM

Plug Co. License No.: 99977 Plug Co. Name: QUALITY OIL WELL CEMENTING

Proposal Rcvd. from: \_\_\_\_\_ Company: \_\_\_\_\_ Phone: \_\_\_\_\_

Proposed Plugging Method: SET CIBP @ 4176' WITH 2 SX CMT. PLUG AT 2200' WITH CMT TO 0'. CHECK BACKSIDE WITH CMT TO 600 PSI.

Plugging Proposal Received By: KENNY SULLIVAN

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 10/06/2015 1:30 PM

KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 4175' WITH 2 SX CMT. RUN TBG TO 2200' & CIRCULATE CMT TO SURFACE WITH 160 SX CMT. TOOH WITH TBG & TOP OFF WITH 25 SX CMT. PUMP 10 SX CMT DOWN THE ANNULUS TO 250 PSI.

Perfs:

Top	Bot	Thru	Comments
4259	4266		
4248	4251		
4226	4239		

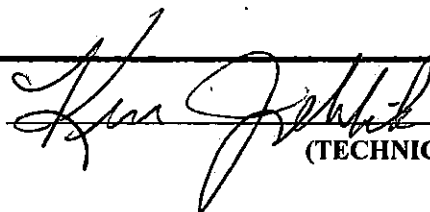
KCC WICHITA  
OCT 26 2015  
RECEIVED

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OIL WELL CEMENTING

Plugged through: TBG

District: 01

Signed

  
(TECHNICIAN)

10/28/15 CKM

RECEIVED  
OCT 16 2015  
KCC DODGE CITY