

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging of formations.

NORTH

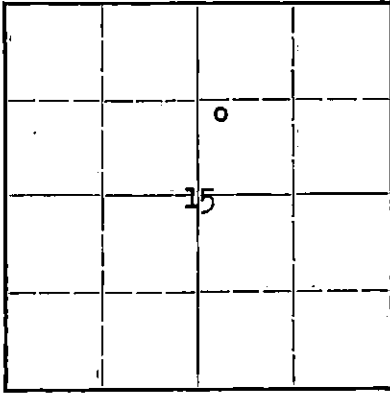

Locate well correctly on above  
Section Plat

Reno County. Sec. 15 Twp. 26S Rge. (E) 9 (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NW SW NE  
Lease Owner Bethlehem Supply Co. (formerly Shell Oil Co., Inc.)  
Lease Name Mary Whipple Well No. 2  
Office Address Box 2171, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed November 22 19 36  
Application for plugging filed December 11 19 45  
Application for plugging approved December 19 19 45  
Plugging commenced February 25 19 46  
Plugging completed January 25 19 47  
Reason for abandonment of well or producing formation Oil Depleted

If a producing well is abandoned, date of last production April 10 19 45  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee  
Producing formation Viola Depth to top 4137 Bottom Total Depth of Well 4155 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
Viola	I.P. 4178 oil & 6% water	4137	4155	13" 7"	220' 4137'	None 2760'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with crushed rock to 4120'. Ran 6 sack cement. Mudded hole to within 30' of top; well gassing; shut down & moved out pulling machine 3-3-46 on orders of State plugger. Moved in & rigged up pulling machine 1-23-47. Bailed hole down & ran rock from 250' to 215'; capped with 25 sacks of cement. Mudded hole to 12' and capped with 10 sacks of cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Bethlehem Supply Company  
Address Box 2171, Tulsa, Oklahoma

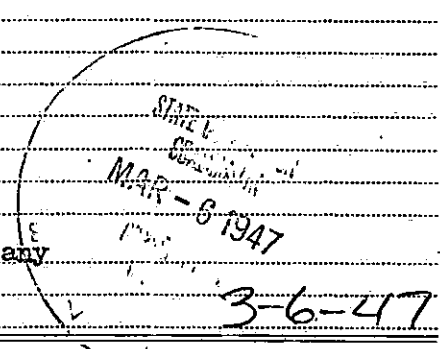

STATE OF Kansas, COUNTY OF Barton, ss.  
J. L. Cleveland (employee of owner) or ~~owner or operator~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. L. Cleveland  
Box 2171, Tulsa, Oklahoma (Address)

SUBSCRIBED AND SWORN to before me this 5th day of March, 19 47.

My commission expires January 24, 1949

Betty Postlethwaite Notary Public.

