

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

WELL PLUGGING APPLICATION FORM

Well Location 330' S.)  
330' W.) Cen. Sec. 15 Twp. 26 Rge. 9 (E) (W) West

Field Name (if any) Lerado County Reno

Lease (Farm Name) Fluke Well No. 2

Was well log filed with application? Yes If not, explain circumstances and give available data (Use an additional sheet if necessary)

Log attached.

Date and hour plugging is desired to begin As soon as possible.

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission, or with the approval of the following exceptions: Explain fully any exceptions desired (Use an additional sheet if necessary)

Name of the person on the lease in charge of well for owner

G. A. Deffeyes Address Box 751, Great Bend, Kansas

Name of well owner or Acting Agent Cities Service Oil Company

Address Bartlesville, Oklahoma

Invoice covering assessment for plugging this well should be sent to:


Cities Service Oil Co. Address Box 751, Great Bend, Kansas

and payment will be guaranteed by applicant.

PLUGGING  
FILE DEC 15 26 94  
BOOK PAGE 75 28

R. A. [Signature]  
Operator or Acting Agent

Date May 22, 1943.

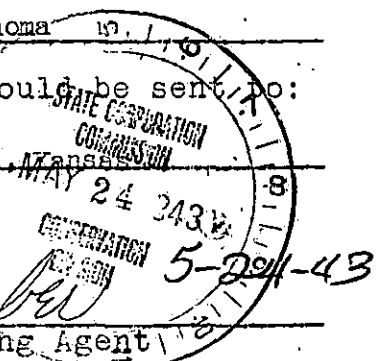



STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

May 24, 1943

IN REPLY PLEASE  
REFER TO THIS  
SUBJECT

Well No. 2  
Farm Fluke  
Description CST# SW SW 15-23-27  
County Reno  
File 75-28

Cities Service Oil Company  
Box 751  
Great Bend, Kansas

Dear Sirs:

This letter is your permit to plug  
the above subject well, in accordance  
with the Rules and Regulations of the  
STATE CORPORATION COMMISSION.

Yours very truly,

STATE CORPORATION COMMISSION

T. A. MORGAN, DIRECTOR  
CONSERVATION DIVISION

HA

By: J. P. Roberts  
J. P. ROBERTS

NOTICE:

Ruel Durkee  
Box 597  
McPherson, Kansas

WELL RECORD

Company Cities Service Oil Co. Well No. 2 Farm Fluke  
 Location 330' S. & 330' W. of Cen. Sec. 15 T. 26 R. 9W  
 Elevation \_\_\_\_\_ County Reno State Kansas  
 Drlg. Comm. August 17, 1937 Contractor Corbett-Barbour Drilling Company  
 Drlg. Comp. September 22, 1937 Acid 1000 gals. Dowell X - Sept. 30, 1937  
 T. D. 4146'-6" Initial Prod. 2506 oil, 24 hrs. (after acid)

CASING RECORD:

15-1/2" @ 131' cem. with 125 sx  
 10" 300' cem. with 230 sx  
 7" OD 4143' cem. with 225 sx

FORMATION RECORD:

surface clay & sand	125
red rock & red bed	252
red rock	260
sand & gravel	268
Lost bottom of cellar	
red beds & shells	511
red bed	590
shale & shells	918
shells & salt	1190
shale & lime shells	1300
lime	1374
lime & lime shells	1476
lime & shale	1582
lime	1615
broken lime	1741
lime	1793
shale & lime	1883
lime	1902
broken lime	1989
broken lime & shale	2175
broken lime	2195
shale & shells	2287
broken lime & shale	2362
shale & lime shells	2445
broken lime	2526
lime	2585
broken lime	2683
shale & shells	2779
shale & lime	2861
lime	2890
broken lime	3021
lime	3035
broken lime	3116
lime	3290
shale & lime shells	3306
shale & lime	3355
Lansing lime	3382
lime	3455

shale & lime	3481
lime	3555
shale & lime	3577
lime	3641
broken lime	3653
lime & shale	3738
lime	3750
broken lime	3759
shale	3770
shale & lime shells	3794
shale & shells	3885
chat	3910
lime Mississippi	3975
broken lime	4010
shale & lime shells	4027
shale	4065
broken lime	4118
shale	4137
lime	4140
brown lime (cored)	4143'6"
shale cored	4145'6"
Viola lime (cored)	4146'6"

Top Oswald	3355'
Top Mississippi	3885'
Top Viola	4143 1/2'
Penetration	3'
Total Depth.	4146 1/2'

Syfo:

435'	10
870'	10
1000'	10
1120'	10
1250'	10
1500'	10
2000'	10
2250'	10
2500'	10
2750'	10
3000'	10
3500'	10
4000'	10

PLUGGING

15 26 9 10 75 28

