


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Stafford County. Sec. 15 Twp. 25S Rge. 14W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines 1700' FNL & 1550' FEL  
Lease Owner National Development Co.  
Lease Name Fox Well No. 1  
Office Address 300 W. Douglas, Wichita, Kansas 67202  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole  
Date Well completed April 13, 1980  
Application for plugging filed Verbal Application 1980  
Application for plugging approved Verbal Approval 1980  
Plugging commenced April 13, 1980  
Plugging completed April 13, 1980  
Reason for abandonment of well or producing formation \_\_\_\_\_

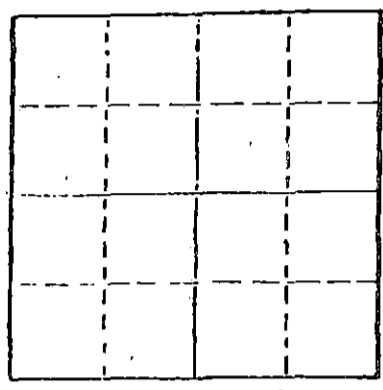

Locate well correctly on above  
Section Plot

If a producing well is abandoned, date of last production 1980  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 14,265'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	368'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 4,265 ft. (rotary total depth) to 600 ft. Set plug at 600 ft. and cemented with 50 sacks cement. Filled hole with heavy rotary mud from 600 ft. to 360 ft. Set plug at 360 ft. and cemented with 40 sacks cement. Filled hole with heavy rotary mud from 360 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 10 sacks cement in rathole.

Plugging operations accomplished utilizing Allied Oilwell cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co., Inc.  
Box 31, Russell, Kansas 67665

STATE OF Kansas COUNTY OF Sedgwick  
Dean Britting, Agent (employee of owner) ~~XXXXXXXXXXXXXXXXXXXX~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) Dean Britting  
200 N. Main, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of April, 1980

Elsie Willison  
Elsie Willison - Notary Public.

My commission expires July 25, 1982

RECEIVED  
APR 28 1980  
STATE CORPORATION COMMISSION  
Wichita, Kansas

