


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Reno County. Sec. 7 Twp. 24 Rge. (E) 5 (W)
Location as "NE/CNW/SW" or footage from lines NW NW NE
Lease Owner Halliburton Oil Producing Company
Lease Name Mills Well No. 1
Office Address Duncan, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 8-23 19 57
Application for plugging filed 8-23 19 57
Application for plugging approved 8-23 19 57
Plugging commenced 8-23 19 57
Plugging completed 8-23 19 57
Reason for abandonment of well or producing formation

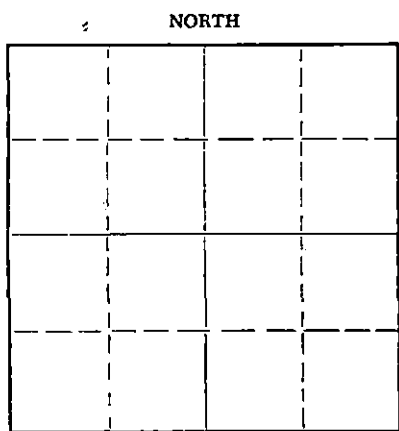

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Depth to top Bottom Total Depth of Well 4044 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13"	330'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Circulated with heavy mud 1/2 way in hole. Plug set @ 300' with 25 sacks cement through 9 joints drill pipe. Bridge 10' below bottom of cellar with 8 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Group Exploration Company
Address Sterling, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.
F. A. Wuellner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Sterling, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 27th day of August, 19 57

My Commission Expires Jan. 22, 1958

My commission expires

Notary Public.
RECEIVED
STATE CORPORATION COMMISSION
AUG 29 1957
PLUGGING
FILE SEC. 1 T. 24 R. 5W
BOOK PAGE 40 LINE 19
CONSERVATION DIVISION
WICHITA, KANSAS
8-28-57

GROUP EXPLORATION COMPANY
Sterling, Kansas

WELL LOG ----- MILLS #1

Located: NW NW NE, Section 7-24S-5W, Reno County, Kansas

OWNER: Halliburton Oil Producing Company
ROTARY DRILLING CONTRACTOR: Group Exploration Company

COMMENCED: 8-7-57
COMPLETED: 8-29-57

TOTAL DEPTH: 4014'

LOG

0 -	25	Clay & Soil
25 -	230	Sand & Shale
230 -	328	Shale & Clay
328 -	460	Shale & Shells
460 -	806	Salt & Shale
806 -	815	Anhydrite
815 -	975	Shale & Shells
975 -	1240	Lime & Shale
1240 -	1585	Lime
1585 -	1815	Lime & Shale
1815 -	1975	Lime
1975 -	2225	Shale & Lime
2225 -	2580	Lime
2580 -	2665	Lime & Shale
2665 -	2815	Shale & Sand
		Tops - Hebner 2620
		Douglas 2695
2815 -	2868	K. C. Lime
2868 -	2957	Lime
2957 -	2978	K. C. Lime
2998 -	3135	Lime
3135 -	3175	Lime & Shale
3175 -	3500	Mississippi
3500 -	3550	Miss. Lime & Chert
3550 -	3595	Lime
3595 -	3650	Chert & Lime
3650 -	3681	Lime
3681 -	3790	Kinderhook Shale
3790 -	3850	Shale
3850 -	3385	Cherty Lime
3885 -	3905	Shale & Chert
3905 -	3925	Viola
3925 -	3929	Simpson
3929 -	3950	Sand
3950 -	3985	Sand, Shale & Quartzite
3985 -	4015	Shale
4015 -	4014	Arbuckle T. D.

CASING RECORD

Set 13" surface casing @ 329'
with 350 sacks cement, 2% c.c.

PRODUCTION RECORD

Plugged & Abandoned

PLUGGING			
FILE	SEC	T.	R.
	1	24	SW
BOOK	PAGE	LINE	
	40	19	

RECEIVED
STATE COMMISSION

STATE COMMISSION
Wichita, Kansas

8-28-57