

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202

RECEIVED
STATE CORPORATION COMMISSION CP-4
Rev. 12-15-80

AUG 30 1982 8-30-82

CONSERVATION DIVISION
Wichita, Kansas

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Stafford SEC. 12 TWP. 25S RGE. 14 W E/W
Location as in quarters or footage from lines:
NE NE NW

Lease Owner Petroleum, Inc.
Lease Name Seevers Well No. 11-1
Office Address 300 W. Douglas - Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole): input
Date Well Completed 8-57 X
Application for plugging filed 8-5-82 X
Plugging commenced 8-11-82
Plugging completed 8-20-82
Reason for abandonment of well or producing formation Dry

Locate Well
correctly on above
Section Platt.

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Buddy Metz

Producing formation _____ Depth to top _____ bottom T.D. 4,313

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
				8 5/8	248	None
				4 1/2	3905	48

Describe in detail the manner in which the well was plugged, indicating where the mud
fluid was placed and the method or methods used in introducing it into the hold. If cement
or other plugs were used, state the character of same and depth placed, from _____ feet
to _____ feet for each plug set.

Plugged back at 3,880
Sand from 3,880 to 3,780
4 sacks cement from 3,780 to 3,740
Sun Cementing Company pumped in 200 sacks 50-50 POZ
4% Jell - 3% C. C.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Clarke Corporation

STATE OF Kansas COUNTY OF Baker, ss.
Alma R. Margenstern (employee of owner) or (owner or operator) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.

(Signature) Alma R. Margenstern
Medicine Springs, KS
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of Aug., 19 82

Jessie Hamilton
Notary Public.

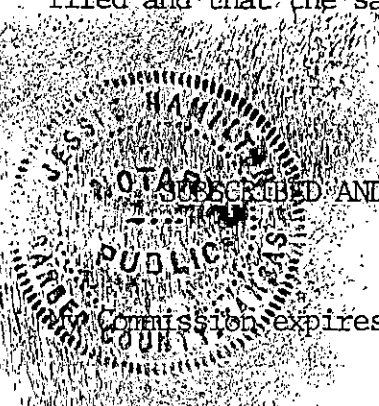

Commission expires: April 4, 1986.

WELL LOG

COMPANY PETROLEUM, INCORPORATED

SEC. 12 T. 25S R. 14W

FARM BOWKER "B" NO. 1

LOC. NE, NE, NW


TOTAL DEPTH 4313'

COUNTY Stafford Co., Kansas

COMM. July 19, 1957

COMP. August 2, 1957

CONTRACTOR GARVEY DRILLING COMPANY



CASING 8 5/8" @ 248' W/225 sax.
4 1/2" @ 3905' W/99 sax.

ELEVATION 1958' DF

PRODUCTION Kansas City

FIGURES INDICATE BOTTOM OF FORMATIONS

150	Sand
249	Shale & shells
700	Red bed, shale & shells"
825	Shale & shells
855	Anhydrite
1850	Shale & shells"
3585	Lime & shale
3650	Lime
3742	Lime & shale
3940	Lime
3985	Shale & lime
4313	Lime & chert
4313	T. D.

RECEIVED
STATE CORPORATION COMMISSION
AUG 12 1982
CONSERVATION DIVISION
Wichita, Kansas

State of KANSAS }
County of BARTON } ss:

I, Verne A. Morris of Garvey Drilling Co.

upon oath state that the above and foregoing is a true and correct copy of the log of the #1 Bowker "B" well

Verne A. Morris

Subscribed and sworn to before me this 24th day of September 19 57

My Commission Expires: July 11, 1960

[Signature]
NOTARY PUBLIC