


15-151-10046-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Pratt County. Sec. 24 Twp. 29S Rge. 14 (W)

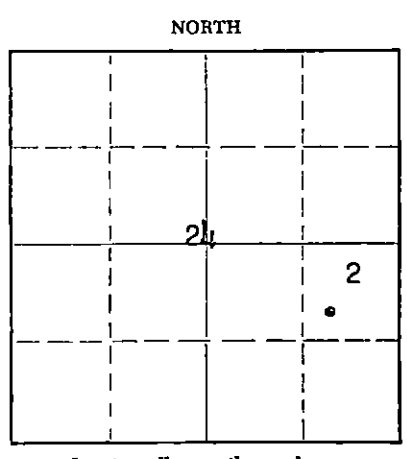

Location as "NE/CNW%SW%" or footage from lines C - SW NE SE  
Lease Owner Monsanto Chemical Company  
Lease Name Andrews "B" Well No. 2  
Office Address P. O. Box 580, Pratt, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 5-7 19 47  
Application for plugging filed 8-16 19 60  
Application for plugging approved 8-18 19 60  
Plugging commenced 8-18 19 60  
Plugging completed 8-22 19 60  
Reason for abandonment of well or producing formation Well had reached its economic limit.  
If a producing well is abandoned, date of last production 8-16 19 60  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred W. Hampel  
Producing formation Arbuckle Depth to top 4335' Bottom 4369' Total Depth of Well 4369 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	488'	None
				5-1/2"	4365'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to 4369' and found it clear.  
Ran sand to 4350' and dumped 4 sacks of cement with dump bailer. 5 1/2" casing had been squeezed with 200 sacks of cement.  
Set rock bridge from 450' to 440' in 5 1/2" casing. Pumped in 40 sacks of cement from 440' to surface. Plugging completed.

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 29 1960  
CONSERVATION DIVISION  
KANSAS

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Knight Casing Pulling Company  
Address Chase, Kansas

STATE OF KANSAS COUNTY OF PRATT ss.  
Conrad M. Cummings (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) Conrad M. Cummings  
P. O. Box 580, Pratt, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 27th day of August, 19 60  
My commission expires September 4, 1962  
Notary Public.

Andrews #B-2  
Section 34-29-14  
Pratt County, Kansas  
Long Oil Company

Commenced: April 5, 1947  
 Completed: April 30, 1947

Surface clay	0	40 :
Sand	40	200
Sand and gravel	200	250
Red bed and shells	250	365
Shale	365	500
Red bed and shells	500	760
Anhydrite	760	790
Red bed, shale and shells	790	1450
Shale and shells	1450	1750
Shale and shells	1750	1910
Lime	1910	2020
Broken lime	2020	2145
Lime, chert and shale	2145	2195
Lime	2195	2250
Lime and shale	2250	2295
Lime	2295	2600
Lime and shale	2600	2720
Lime	2720	2810
Lime and shale	2810	3030
Lime	3030	3070
Lime and shale	3070	3695
Lime	3695	3785
Lime and shale	3785	3893
Lime	3893	3919
Lime and shale	3919	3942
Lime	3942	3982
Lime and shale	3982	4013
Lime	4013	4331
Lime and shale	4331	4369
 TOTAL DEPTH	 4369	

CASING RECORD

8-3/4" Casing set at 436' and cemented  
 with 300 sacks of cement.

STATE OF OKLAHOMA )

COUNTY OF TULSA )

I hereby affirm that the above and foregoing is a true and correct copy of the log of your Andrews #B-2 well, located in Section 34, Township 29, Range 14, Pratt County, Kansas.

HELMERICH & PAYNE, INC.

By *William B. ...*  
 Treasurer

Subscribed and sworn to before me, a Notary Public, this 12th day of May, 1947.

*Paul ...*  
 Notary Public

My commission expires July 22, 1947

