

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County. Sec. 24 Twp. 29S Rge. 11E 14(W)

Location as "NE/CNW/SW" or footage from lines C - SE 1/4 NW 1/4 SE 1/4

Lease Owner Monsanto Chemical Company

Lease Name Andrews "B" Well No. 3

Office Address P. O. Box 580, Pratt, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed 6-4 1947

Application for plugging filed 9-23 1959

Application for plugging approved 9-23 1959


Plugging commenced 10-1 1959

Plugging completed 10-5 1959

Reason for abandonment of well or producing formation Well ceased to produce enough oil to be marketable.

If a producing well is abandoned, date of last production March 1958

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

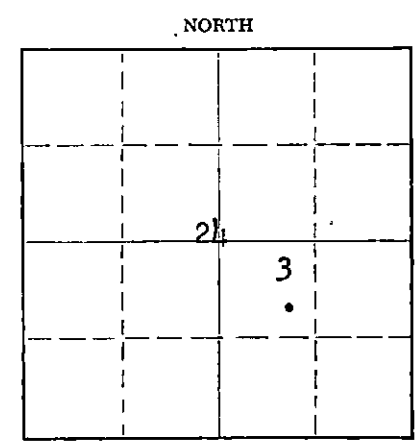

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. W. L. Lackamp

Producing formation Lansing-Kansas City Depth to top 3873 Bottom 3966 Total Depth of Well 4147 Feet (P. B. T. D. 39751)

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	438'	0'
				5-1/2"	4146'	2936'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set 5 sacks cement plug from 3880' to 3840'.
Heavy mud from 3840' to 350'.
10' rock bridge plus 20 sacks cement from 350' to 280'.
Heavy mud from 280' to 40'.
10' rock bridge plus 10 sacks cement from 40' to bottom of cellar.

RECEIVED
STATE CORPORATION COMMISSION

OCT 9 1959

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Knight Casing Pulling Company
Address Box 304, Chase, Kansas

STATE OF KANSAS COUNTY OF PRATT, ss.
Bruce E. Roll (employee of owner)

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bruce E. Roll

P. O. Box 580, Pratt, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 8th day of October, 1959

Notary Public Signature

My commission expires September 4, 1962

WELL LOG BUREAU KANSAS GEOLOGICAL SOCIETY
412 Union National Bldg., Wichita, Kansas


COPY

Company - LION OIL COMPANY
Farm - Andrews "B" No. 3

SEC. 24 T. 29 R. 14W
SE NW SE

Total Depth. 4446'
Comm. 5-1-47 Comp. 5-25-47
Shot or Treated.
Contractor.
Issued. 8-9-47

County. Pratt
KANSAS



CASING:
8-5/8" 438' Com. w/350 sx
5-1/2" 4446' Com. w/250 sx

Elevation. _____

Production. Pot. 105 BO & 150
BW

Figures Indicate Bottom of Formations.

surface clay	0-40
surface clay & sand	372
shale & shells	750
anhydrite	770
shale & shells	1915
shale & lime	1925
lime	2015
lime & chert	2140
lime	2230
lime & shale	2325
lime	2420
lime & shale	2570
lime	2615
lime & shale	3000
lime	3058
shale & lime	3125
lime	3146
lime & shale	3270
lime	3385
lime & shale	3435
lime	3490
lime & shale	3590
lime	3620
lime & shale	3735
lime	3953
lime cherty	3983
lime	4358
lime & chert	4368
lime	4446
Total Depth	

Tops:	
Lansing	3871
Simpson	4323
Arbuckle	4338