


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

NORTH

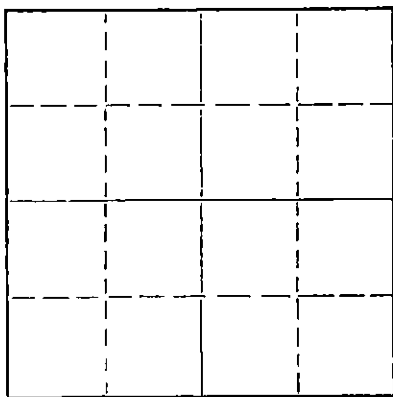

Locate well correctly on above  
Section Plat

Stafford County. Sec. 9 Twp 25 Rge. 14 (E) (W)  
Location as "NE/CNW%SW%" or footage from lines ~~XXXXXXXXXX~~ NW NE NE  
Lease Owner Morris Sitrin  
Lease Name Collins Well No. 2  
Office Address Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 1/31/68 19  
Plugging completed 2/5/68 19  
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Elving  
Producing formation Depth to top Bottom Total Depth of Well 4246 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	262'	none
				5-1/2"	4246'	2428'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, sanded back to 3275' and ran 5 sacks of cement.  
Checked hole, shot pipe at 3648', loaded hole, checked hole, shot pipe at 2621', 2517' and 2411', worked pipe loose and pulled 70 joints.  
Set 10' rock bridge at 250' and mixed and dumped 15 sacks of cement.  
Bailed hole dry, dumped 10 sacks of cement. Mudded to 40' and 10' rock bridge and ran 10 sacks of cement.

Plugging complete.

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 4 - 1968  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of February, 1968

Margaret Melcher  
Notary Public.

Commission expires February 15, 1971

COMPANY: Morris Sitrin  
Box 1160  
Tulsa, Oklahoma

LEASE NAME: Collins WELL NO. 2

LOCATION: NW NE NE Sec. 9-T25-14

COUNTY: Stafford

WELL DATA:

8-5/8" - 24 lb. set 265' 200 sx common cement.

5-1/2" - 14 lb. 4244' 150 sx

Total Depth: 4246'

3532 - 3536 Chalky limestone  
3567 - 3571 Crystalline lime  
3805 - 3849 White buff crystalline  
3864 - 3870 Kansas City  
4086 Mississippi  
4246 Total Depth

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 2 - 1968  
CONSERVATION DIVISION  
Wichita, Kansas