


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

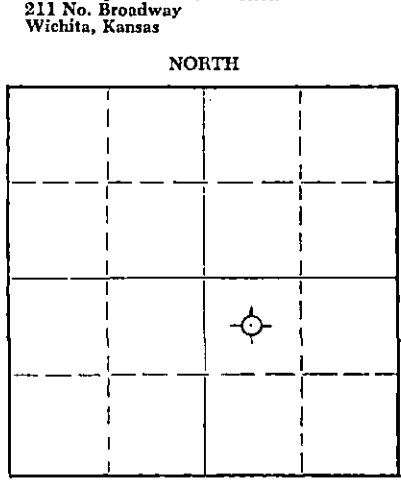

Locate well correctly on above Section Plat

Hamilton County. Sec. 32 Twp. 25S Rge. 40W (E) (W)
Location as "NE/CNW/SW" or footage from lines. 1980' FS&E Lines
Lease Owner Phillips Petroleum Company
Lease Name Barstow "A" Well No. 1
Office Address Box 358, Phillips, Texas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 20, 19 65
Application for plugging filed September 28, 19 65
Application for plugging approved September 28, 19 65
Plugging commenced September 29, 19 65
Plugging completed September 29, 19 65
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production No Production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh E. Scott
Producing formation None Depth to top - Bottom - Total Depth of Well 2583 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Surface Clay, Sand</u>	<u>Water</u>	<u>0</u>	<u>400</u>	<u>8 5/8" OD</u>	<u>248</u>	<u>3'</u>
<u>No Gas or Oil Producing Formations</u>				<u>No Production Pipe Run</u>		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole standing full mud. Spotted 50 sack regular cement plug from 260' to 160' and 15 sack regular cement plug from 45' to surface. Cut 8 5/8" OD Surface Casing off 3' below ground level and welded steel plate on top. Backfilled rat hole and cleaned and leveled location.

RECEIVED
STATE CORPORATION COMMISSION
OCT 5 1965
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Halliburton Company
Address Liberal, Kansas

STATE OF Texas COUNTY OF Hutchinson, ss.
G. W. Cone (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. W. Cone
Box 358, Phillips, Texas
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of October, 19 65

My commission expires 6-1-67
J. P. Higgins
Notary Public.



LEASE: BARSTOW "A" NO. 1 LOCATION: NW SE 1980' FS&EL
 OWNER: PHILLIPS PETROLEUM COMPANY SECTION 32-25S-40W
 CONT: EARL F. WAKEFIELD HAMILTON COUNTY, KANSAS
 COMM: 7-14-65 CASING: 8 5/8" Set @ 256'
 COMP: 7-19-65

Shale	260
Gravel & Sand	355
Shale	935
Shale & Anhydrite	1205
Gyp & Salt	1680
Shale & Anhydrite	1880
Shale	1994
Anhydrite	2015
Shale - Lime	2087
Lime & Shale	2461
Dolomite - Shales	2565
Sand	2570
Shale	2583
R.T.D.	2583

RECEIVED
 STATE GEOLOGICAL SURVEY
 OCT 5 1965
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, FRED S. BARKER, DO HEREBY CERTIFY THAT THE ABOVE IS A TRUE AND CORRECT COPY OF THE DRILLER'S LOG ON THE BARSTOW "A" #1, LOCATED 1980' FS&EL OF SECTION 32-25S-40W, HAMILTON COUNTY, KANSAS.

EARL F. WAKEFIELD

BY Fred S. Barker

SUBSCRIBED AND SWORN TO BEFORE ME THIS 27TH DAY OF JULY, 1965.

MY COMMISSION EXPIRES:
JANUARY 25, 1969

Wanda V. Riley
 NOTARY PUBLIC