

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Stafford County. Sec. 29 Twp. 25S Rge. 14W (E) (W)

Location as "NE/CNW%SW%" or footage from lines SE SE NE

Lease Owner Alpine Oil & Royalty Co., Inc.

Lease Name Nellie Waters Well No. B-1

Office Address 1100 Bitting Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed May 18, 1957 19

Application for plugging filed December 5, 1957 19

Application for plugging approved December 9, 1957 19

Plugging commenced December 15, 1957 19


Plugging completed December 17, 1957 19

Reason for abandonment of well or producing formation _____

Non-productive in commercial quantities

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Frank Broadfoot

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4065 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	285'	Cemented
				5 1/2"	4065'	2921.39'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 3895 feet and dumped 5 sacks cement
Pulled casing. Mud hole with chunk mud to 270 feet, set 5 feet
rock bridge, mixed and dumped 10 sacks cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Company

Address Box 304, Great Bend, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.

Dwight J. Wilson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dwight J. Wilson

1100 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 26th day of December, 19 57

Virginia Mundell
Notary Public.

My commission expires August 10, 1961

STATE CORPORATION COMMISSION

PLUGGING
FILE SEC 29 T 25 R 14W
BOOK PAGE 66 LINE 27

DEC 22 1957

12-27-57

WELL LOG

ALPINE OIL & ROYALTY CO., INC.

Commenced: April 7, 1957

Contractor: Quaker Drilling Co., Inc.

Completed: April 19, 1957

Nellie Waters "B" No. 1
SE SE NE Sec. 29--25S--14W
Stafford County, Kansas

Elevation: 1999 K. B.

Casing Record:


Set 8 5/8 inch casing at 285 feet with 250 sacks pozmix.
Set 5 1/2 inch casing at 4065 feet with 225 sacks pozmix.

(Figures Indicate the Bottom of the Formations)

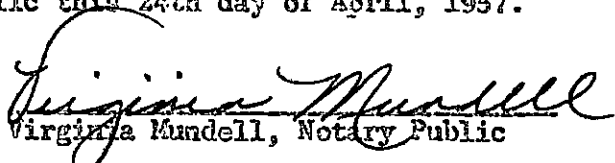
<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>	
Surface Soil & Sand	230	Anhydrite	892
Shale and Shells	285	Heebner	3594 -1595
Red Bed	475	Brown Lime	3740 -1741
Shale and Red Bed	892	Lansing	3765 -1766
Anhydrite	921	Base of Kansas City	4056 -2057
Shale and Shells	1875	Rotary Total Depth	4065 -2066
Lime	1965		
Lime and Shale	2515		
Shale and Lime	2750		
Lime and Shale	3140		
Sandy Lime and Shale	3315		
Lime and Shale	3328		
Lime	3917		
Lime and Shale	3930		
Lime	4056		
Lime and Shale	4065		

We hereby certify the foregoing to be a true and correct copy of the Driller's Log of the well drilled in the SE SE NE of Section 29, Township 25 South, Range 14 West, Stafford County, Kansas.

QUAKER DRILLING CO., INC.

By: 
Thomas M. McCaul, President

SUBSCRIBED AND SWORN to before me a Notary Public this 24th day of April, 1957.


Virginia Mundell, Notary Public

MY COMMISSION EXPIRES:
August 10, 1957

PLUGGING
FILE SEC 29 T.25S. R.14W
BOOK PAGE 66 LINE 27