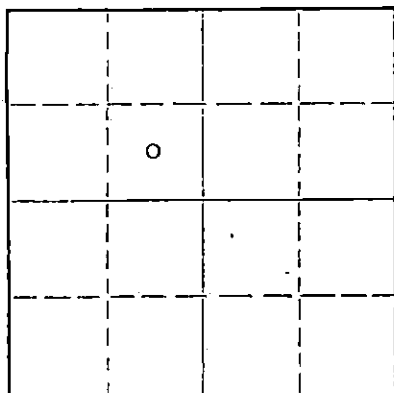


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Stafford

County. Sec. 30 Twp. 25S Rge. (E) 14 (W)

Location as "NE/CNW/SW" or footage from lines C SE NW

Lease Owner Western Petroleum Co., Inc.

Lease Name Boylan "A"

Well No. 1

Office Address 925 Patton Road, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed August 16 1963

Application for plugging filed August 16 1963

Application for plugging approved August 16 1963

Plugging commenced August 16 1963

Plugging completed August 17 1963

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production --- 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie V. Elving

Producing formation None Depth to top -- Bottom -- Total Depth of Well 4400 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		-0-	313	8-5/8"	313	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from --- feet to --- feet for each plug set.

Filled hole with rotary mud to 305'. Pushed plug to 305' and 1/4 sack hulls; cemented with 25 sacks cement. Added rotary mud and placed top plug at 40' with 1/4 sack of hulls. Cemented with 15 sacks cement. Job completed 2:00 A. M., August 17, 1963.

RECEIVED
STATE CORPORATION COMMISSION

AUG 21 1963

8-21-63

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Strata Drilling, Inc.

Name of Plugging Contractor

Address 2421 - 10th St., Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.

F. L. Copeland

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

925 Patton Road, Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 19th day of August, 1963

My commission expires January 15, 1967

Reva C. Brown

Notary Public.

D R I L L E R S L O G

#1 Boylan "A"

CASING RECORD:
305.33' of 8-5/8"
surface casing.

CONTRACTOR: Strata Drilling, Inc. DESCRIPTION: C/SE NW
Section 30-25S-14W
COMPANY: Western Petroleum Co., Stafford County, Kansas
Inc.

TOTAL DEPTH:
4400'

COMMENCED: August 7, 1963
COMPLETED: August 17, 1963

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand & Shale	0	315	Ran 305.33' of 8-5/8" surface cas-
Red Bed Shale	315	1450	ing; set and cemented at 313' with
Shale	1450	2030	300 sacks of regular cement, 2%
Lime & Shale	2030	3790	gel and 3% C. C.. Plug down at
Lime	3790	4155	11:30 P. M.. Cement did not circ.
Lime & Shale	4155	4200	Ran 1" pipe on the outside to 42'
Lime & Chert	4200	4236	and filled up to cellar with cement.
Lime	4236	4258	
Chert & Shale	4258	4268	
Shale	4268	4325	
Lime Shale & Chert	4325	4345	
Chert & Lime	4345	4400	

Total Depth 4400'

Ran two drill stem tests.

Ran Schlumberger log.

RECEIVED
STATE CORPORATION COMMISSION

AUG 21 1963

CONSERVATION DIVISION
Wichita, Kansas

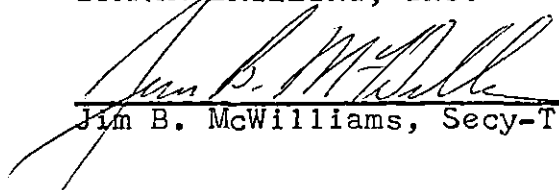
D. & A.

Hole plugged as follows: Plugged
at 305' with 25 sacks of cement and
1/4 sack of hulls to 40'; plugged
with 15 sacks of cement and 1/4 sack
of hulls. Job completed at 2:00
A. M. August 17, 1963.


STATE OF KANSAS)
COUNTY OF BARTON) ss:

I certify that this is a true and correct copy of the above log to
the best of my knowledge.

STRATA DRILLING, INC.


Jim B. McWilliams, Secy-Treas.

Subscribed and sworn before me this 19th day of August, 1963.


Elaine H. Taylor, Notary Public

My Commission Expires:

December 14, 1965