


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

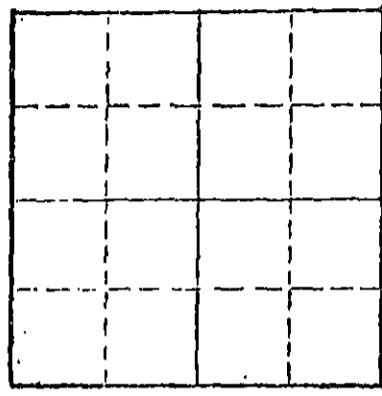

Locate well correctly on above
Section Plat

Stafford County, Sec. 31 Twp. 25²* Rge. 14 (E) (W)
Location as "NE/CNWKSW" or footage from lines. 150' SW of SE SW
Lease Owner. Clinton Oil Company
Lease Name. Beck #1 Well No.
Office Address. Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 11/12/73 19
Plugging completed 11/15/73 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4410 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	354	none
				5 1/2	4352	2949

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked bottom, ran sand to 4250' and ran 5 sacks cement.
Loaded hole, shot pipe at 3488', 3395', 3304', 3205', 3107',
2948', pulled 91 joints. Bailed hole to 200' and set 10'
rock bridge and dumped 4 yards ready mix.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
DEC 21 1973
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 7th day of December 1973

My commission expires
MARGARET MELGHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

Margaret Melgher
Notary Public.

DRILLERS' LOG

CLINTON OIL COMPANY
Ralph Beck 1-V
SW SE SW, Sec. 31-25S-14W
Stafford, County, Kansas

Elevation: 2014 F.S.

Commenced: 1-13-73
Completed: 1-22-73

Surface Casing: 258.86' of
10-³/₄" cemented w/800 sx cement,
2% cc. 1-14-73

<u>FORMATION</u>	<u>DEPTH</u>
Sand & Clay	0 - 225
Red Bed	225 - 354
Shale, Sand & Red Bed	354 - 963
Anhydrite	963 - 977
Shale & Red Bed	977 - 1100
Shale & Sand	1100 - 1870
Shale & Lime	1870 - 2470
Lime	2470 - 4280
Chert	4280 - 4284
Lime	4284 - 4410 T.D.

RECEIVED
STATE CORPORATION COMMISSION
SEP 27 1973
CONSERVATION DIVISION
Wichita, Kansas

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me, the undersigned, a Notary Public in and for said state, this 24th day of January, 1973.

My Commission Expires:
August 25, 1976

Ella Priess
Ella Priess, Notary Public

Ella Priess
STATE NOTARY PUBLIC
Lodgepole County, Kansas
My Com. Expires Aug. 25, 1976