


15-647-20180-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

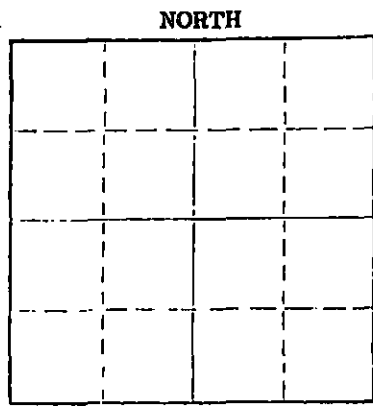

Locate well correctly on above Section Plot

Edwards County. Sec. 9 Twp. 26 Rge. 17 (E) (W)
Location as "NE/CNW/SW" or footage from lines C SW NW
Lease Owner Murfin Drilling Company
Lease Name Rosenbaugh #1 Well No. _____
Office Address Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 1/8/76 _____ 19____
Plugging completed 1/13/76 _____ 19____
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4710 feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	252	none
				4 1/2"	3293	2798'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, sanded to 3150' and dumped 4 sacks cement.
Shot pipe at 3000', 2785', pulled 66 joints. Allied pumped 2 sacks hulls, 10 sacks gel and 100 sacks cement.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KELSO CASING PULLING
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss. R. DARRELL KELSO

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS

SUBSCRIBED AND SWORN to before me this 20th day of January (Address) 76, 1976

My commission expires _____
NOTARY PUBLIC
MARGARET MELCHER
Rice County, Ks.
My Comm. Exp. Feb. 15, 1979

Margaret Melcher
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
JAN 22 1976
1-22-76
CONSERVATION DIVISION
Wichita, Kansas

15-047-20180-0000

DRILLERS LOG

#1 ROENBAUGH
C SW NW Section 9-26S-17W
Edwards County, Kansas

OPERATOR: Murfin Drilling Company
617 Union Center
Wichita, Kansas 67202

CONTRACTOR: Dunne-Gardner Petroleum, Inc.
Suite 250, 200 West Douglas
Wichita, Kansas 67202

COMMENCED: July 6, 1975

COMPLETED: July 23, 1975

CASING RECORD: 8-5/8" @ 252' w/225 sx
4-1/2" @ 3293' w/100 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	252	Sand and blue shale
252	310	Shale
310	600	Shale and shells
600	608	Blaine
608	1056	Shale and sand
1056	1201	Red bed and shale
1201	1243	Anhydrite
1243	1810	Shale
1810	3905	Lime and shale
3905	4698	Lime
4698	4710	Lime and chert
4710		Rotary total depth

RECEIVED
STATE CORPORATION COMMISSION

JAN 6 1976

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log to the best of my knowledge and belief.


Don Gardner

Subscribed and sworn to before me this 29th day of July, 1975.

My commission expires:
March 1, 1978


Notary Public